



US009243316B2

(12) **United States Patent**
Larson, III et al.

(10) **Patent No.:** **US 9,243,316 B2**
(45) **Date of Patent:** **Jan. 26, 2016**

(54) **METHOD OF FABRICATING
PIEZOELECTRIC MATERIAL WITH
SELECTED C-AXIS ORIENTATION**

(75) Inventors: **John Larson, III**, Palo Alto, CA (US);
Sergey Mishin, Goleta, CA (US)

(73) Assignee: **Avago Technologies General IP
(Singapore) Pte. Ltd.**, Singapore (SG)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 909 days.

(21) Appl. No.: **12/692,108**

(22) Filed: **Jan. 22, 2010**

(65) **Prior Publication Data**

US 2011/0180391 A1 Jul. 28, 2011

(51) **Int. Cl.**

- C23C 14/34* (2006.01)
- C23C 14/06* (2006.01)
- C23C 14/00* (2006.01)
- C23C 14/02* (2006.01)
- C23C 14/22* (2006.01)
- H03H 3/007* (2006.01)

(52) **U.S. Cl.**

CPC *C23C 14/0617* (2013.01); *C23C 14/0036* (2013.01); *C23C 14/02* (2013.01); *C23C 14/022* (2013.01); *C23C 14/0641* (2013.01); *C23C 14/228* (2013.01); *C23C 14/345* (2013.01); *H03H 2003/0071* (2013.01)

(58) **Field of Classification Search**

CPC C23C 14/0641; C23C 14/228; C23C 14/0617; C23C 14/02; C23C 14/0036
USPC 204/192.12, 192.15, 192.18
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,174,122 A 3/1965 Fowler et al.
3,189,851 A 6/1965 Fowler
(Continued)

FOREIGN PATENT DOCUMENTS

CN 101170303 4/2008
DE 10239317 3/2004
(Continued)

OTHER PUBLICATIONS

Chen, "Fabrication and Characterization of ALN Thin Film Bulk Acoustic Wave Resonator" Dissertation, University of Pittsburgh School of Engineering, 2006.


(Continued)

Primary Examiner — Jason M Berman

(57) **ABSTRACT**

In accordance with a representative embodiment, a method of fabricating a piezoelectric material comprising a first component and a second component comprises: providing a substrate; flowing hydrogen over the substrate; flowing the first component to form the piezoelectric material over a target; and sputtering the piezoelectric material from the target on the substrate. In accordance with another representative embodiment, a method of fabricating a bulk acoustic wave (BAW) resonator comprises: forming a first electrode over a substrate; forming a seed layer over the substrate; and depositing a piezoelectric material having a compression-negative (C_N) polarity. The depositing of the piezoelectric material comprises: flowing a first component of the piezoelectric material to form the piezoelectric material over a target comprising a second component of the piezoelectric material; and sputtering the piezoelectric material from the target to the substrate.

23 Claims, 10 Drawing Sheets

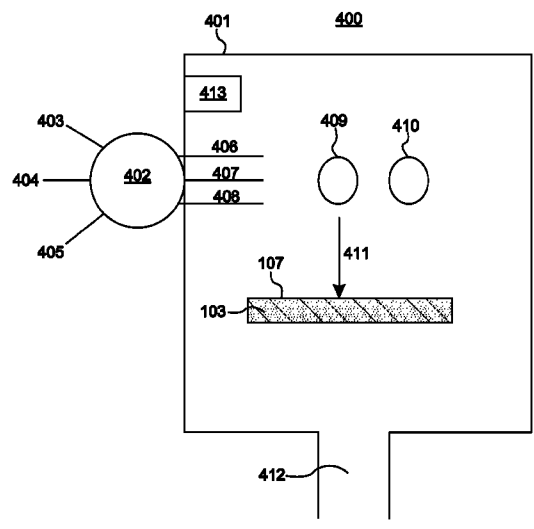

(56)

References Cited

U.S. PATENT DOCUMENTS

3,321,648 A	5/1967	Kolm	5,853,601 A	12/1998	Krishnaswamy et al.
3,422,371 A	1/1969	Poirier et al.	5,864,261 A	1/1999	Weber
3,568,108 A	3/1971	Poirier et al.	5,866,969 A	2/1999	Shimada et al.
3,582,839 A	6/1971	Pim et al.	5,872,493 A	2/1999	Ella
3,590,287 A *	6/1971	Berlincourt et al. 310/321	5,873,153 A	2/1999	Ruby et al.
3,610,969 A	10/1971	Clawson et al.	5,873,154 A	2/1999	Ylilammi et al.
3,826,931 A	7/1974	Hammond	5,894,184 A	4/1999	Furuhashi et al.
3,845,402 A	10/1974	Nupp	5,894,647 A	4/1999	Lakin
4,084,217 A	4/1978	Brandli et al.	5,910,756 A	6/1999	Ella
4,172,277 A	10/1979	Pinson	5,932,953 A	8/1999	Drees et al.
4,320,365 A	11/1980	Black et al.	5,936,150 A	8/1999	Kobrin et al.
4,272,742 A	6/1981	Lewis	5,953,479 A	9/1999	Zhou et al.
4,281,299 A	7/1981	Newbold	5,955,926 A	9/1999	Uda et al.
4,344,004 A	8/1982	Okubo	5,962,787 A	10/1999	Okada et al.
4,355,408 A	10/1982	Scarrott	5,969,463 A	11/1999	Tomita
4,419,202 A *	12/1983	Gibson 204/192.16	5,982,297 A	11/1999	Welle
4,456,850 A	6/1984	Inoue et al.	6,001,664 A	12/1999	Swirhun et al.
4,529,904 A	7/1985	Hattersley	6,016,052 A	1/2000	Vaughn
4,608,541 A	8/1986	Moriwaki et al.	6,040,962 A	3/2000	Kanazawa et al.
4,625,138 A	11/1986	Ballato	6,051,907 A	4/2000	Ylilammi
4,633,285 A	12/1986	Hunsinger et al.	6,060,818 A	5/2000	Ruby et al.
4,640,756 A	2/1987	Wang et al.	6,114,795 A	5/2000	Tajima et al.
4,719,383 A	1/1988	Wang et al.	6,087,198 A	7/2000	Panasik
4,769,272 A	9/1988	Byrne et al.	6,090,687 A	7/2000	Merchant et al.
4,798,990 A	1/1989	Henoch	6,099,700 A *	8/2000	Lee et al. 204/192.18
4,819,215 A	4/1989	Yokoyama et al.	6,107,721 A	8/2000	Lakin
4,836,882 A	6/1989	Ballato	6,111,341 A	8/2000	Hirama
4,841,429 A	6/1989	McClanahan et al.	6,111,480 A	8/2000	Iyama et al.
4,906,840 A	3/1990	Zdeblick et al.	6,118,181 A	9/2000	Merchant et al.
4,916,520 A	4/1990	Kurashima	6,124,678 A	9/2000	Bishop et al.
4,933,743 A	6/1990	Thomas et al.	6,124,756 A	9/2000	Yaklin et al.
5,006,478 A	4/1991	Kobayashi et al.	6,131,256 A	10/2000	Dydyk
5,048,036 A	9/1991	Scifres et al.	6,150,703 A	11/2000	Cushman et al.
5,048,038 A	9/1991	Brennan et al.	6,187,513 B1	2/2001	Katakura
5,066,925 A	11/1991	Freitag	6,198,208 B1	3/2001	Yano et al.
5,075,641 A	12/1991	Weber et al.	6,215,375 B1	4/2001	Larson et al.
5,067,959 A	2/1992	Omori et al.	6,219,032 B1	4/2001	Rosenberg et al.
5,111,157 A	5/1992	Komiak	6,219,263 B1	4/2001	Wuidart
5,118,982 A	6/1992	Inoue et al.	6,228,675 B1	5/2001	Ruby et al.
5,129,132 A	7/1992	Zdeblick et al.	6,229,247 B1	5/2001	Bishop
5,162,691 A	11/1992	Mariani et al.	6,252,229 B1	6/2001	Hays et al.
5,166,646 A	11/1992	Avanic et al.	6,262,600 B1	7/2001	Haigh et al.
5,185,589 A	2/1993	Krishnaswamy et al.	6,263,735 B1	7/2001	Nakatani et al.
5,214,392 A	5/1993	Kobayashi et al.	6,265,246 B1	7/2001	Ruby et al.
5,233,259 A	8/1993	Krishnaswamy et al.	6,278,342 B1	8/2001	Ella
5,241,209 A	8/1993	Sasaki	6,284,121 B1	9/2001	Reid
5,241,456 A	8/1993	Marcinkiewicz et al.	6,292,336 B1	9/2001	Hornng et al.
5,262,347 A	11/1993	Sands	6,306,755 B1	10/2001	Zheng
5,270,492 A	12/1993	Fukui	6,307,447 B1	10/2001	Barber et al.
5,294,898 A	3/1994	Dworsky et al.	6,307,761 B1	10/2001	Nakagawa
5,361,077 A	11/1994	Weber	6,335,548 B1	1/2002	Roberts et al.
5,382,930 A	1/1995	Stokes et al.	6,355,498 B1	3/2002	Chan et al.
5,384,808 A	1/1995	Van Brunt et al.	6,366,006 B1	4/2002	Boyd
5,448,014 A	9/1995	Kong et al.	6,376,280 B1	4/2002	Ruby et al.
5,465,725 A	11/1995	Seyed-Boloforosh	6,377,137 B1	4/2002	Ruby
5,475,351 A	12/1995	Uematsu et al.	6,384,697 B1	5/2002	Ruby
5,548,189 A	8/1996	Williams	6,396,200 B2	5/2002	Misu et al.
5,567,334 A	10/1996	Baker et al.	6,407,649 B1	6/2002	Tikka et al.
5,714,917 A	10/1996	Ella	6,414,569 B1	7/2002	Nakafuku
5,587,620 A	12/1996	Ruby et al.	6,420,820 B1	7/2002	Larson
5,589,858 A	12/1996	Kadowaki et al.	6,424,237 B1	7/2002	Ruby et al.
5,594,705 A	1/1997	Connor et al.	6,429,511 B2	8/2002	Ruby et al.
5,603,324 A	2/1997	Oppelt et al.	6,434,030 B1	8/2002	Rehm et al.
5,616,208 A *	4/1997	Lee 156/345.24	6,437,482 B1	8/2002	Shibata
5,633,574 A	5/1997	Sage	6,441,539 B1	8/2002	Kitamura et al.
5,671,242 A	9/1997	Takiguchi et al.	6,441,702 B1	8/2002	Ella et al.
5,692,279 A	12/1997	Mang et al.	6,462,631 B2	10/2002	Bradley et al.
5,698,928 A	12/1997	Mang et al.	6,466,105 B1	10/2002	Lobl et al.
5,704,037 A	12/1997	Chen	6,466,418 B1	10/2002	Hornng et al.
5,705,877 A	1/1998	Shimada	6,469,597 B2	10/2002	Ruby et al.
5,729,008 A	3/1998	Blalock et al.	6,469,909 B2	10/2002	Simmons
5,789,845 A	8/1998	Wadaka et al.	6,472,954 B1	10/2002	Ruby et al.
5,817,446 A	10/1998	Lammert	6,476,536 B1	11/2002	Pensala
5,825,092 A	10/1998	Delgado et al.	6,479,320 B1	11/2002	Gooch
5,835,142 A	11/1998	Nakamura et al.	6,483,229 B2	11/2002	Larson et al.
			6,486,751 B1	11/2002	Barber et al.
			6,489,688 B1	12/2002	Baumann et al.
			6,492,883 B2	12/2002	Liang et al.
			6,496,085 B2	12/2002	Ella et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,498,604	B1	12/2002	Jensen	6,927,651	B2	8/2005	Larson, III et al.
6,507,983	B1	1/2003	Ruby et al.	6,936,837	B2	8/2005	Yamada et al.
6,515,558	B1	2/2003	Yililammi	6,936,928	B2	8/2005	Hedler et al.
6,518,860	B2	2/2003	Ella et al.	6,936,954	B2	8/2005	Peczalski
6,525,996	B1	2/2003	Miyazawa	6,941,036	B2	9/2005	Lucero
6,528,344	B2	3/2003	Kang	6,943,647	B2	9/2005	Aigner et al.
6,530,515	B1	3/2003	Glenn et al.	6,943,648	B2	9/2005	Maiz et al.
6,534,900	B2	3/2003	Aigner et al.	6,946,928	B2	9/2005	Larson et al.
6,542,055	B1	4/2003	Frank et al.	6,954,121	B2	10/2005	Bradley et al.
6,548,942	B1	4/2003	Panasik	6,963,257	B2	11/2005	Ella et al.
6,548,943	B2	4/2003	Kaitila et al.	6,970,365	B2	11/2005	Turchi
6,549,394	B1	4/2003	Williams	6,975,183	B2	12/2005	Aigner et al.
6,550,664	B2	4/2003	Bradley et al.	6,977,563	B2	12/2005	Komuro et al.
6,559,487	B1	5/2003	Kang et al.	6,985,051	B2	1/2006	Nguyen et al.
6,559,530	B2	5/2003	Hinzel et al.	6,985,052	B2	1/2006	Tikka
6,564,448	B1	5/2003	Oura et al.	6,987,433	B2	1/2006	Larson, III et al.
6,566,956	B2	5/2003	Ohnishi et al.	6,989,723	B2	1/2006	Komuro et al.
6,566,979	B2	5/2003	Larson et al.	6,998,940	B2	2/2006	Metzger
6,580,159	B1	6/2003	Fusaro et al.	7,002,437	B2	2/2006	Takeuchi et al.
6,583,374	B2	6/2003	Knieser et al.	7,019,604	B2	3/2006	Gotoh et al.
6,583,688	B2	6/2003	Klee et al.	7,019,605	B2	3/2006	Larson
6,593,870	B2	7/2003	Dummermuth et al.	7,026,876	B1	4/2006	Esfandiari et al.
6,594,165	B2	7/2003	Duerbaum et al.	7,053,456	B2	5/2006	Matsuo
6,600,390	B2	7/2003	Frank	7,057,476	B2	6/2006	Hwu
6,601,276	B2	8/2003	Barber	7,057,478	B2	6/2006	Korden et al.
6,603,182	B1	8/2003	Low et al.	7,064,606	B2	6/2006	Louis
6,607,934	B2	8/2003	Chang et al.	7,084,553	B2	8/2006	Ludwiczak
6,617,249	B2	9/2003	Ruby et al.	7,091,649	B2	8/2006	Larson, III et al.
6,617,750	B2	9/2003	Dummermuth et al.	7,098,758	B2	8/2006	Wang et al.
6,617,751	B2	9/2003	Sunwoo et al.	7,102,460	B2	9/2006	Schmidhammer et al.
6,621,137	B1	9/2003	Ma et al.	7,109,826	B2	9/2006	Ginsburg et al.
6,630,753	B2	10/2003	Malik et al.	7,128,941	B2	10/2006	Lee
6,635,509	B1	10/2003	Ouellet	7,129,806	B2	10/2006	Sato
6,639,872	B1	10/2003	Rein	7,138,889	B2	11/2006	Lakin
6,651,488	B2	11/2003	Larson et al.	7,161,448	B2	1/2007	Feng et al.
6,657,363	B1	12/2003	Aigner	7,170,215	B2	1/2007	Namba et al.
6,668,618	B2	12/2003	Larson et al.	7,173,504	B2	2/2007	Larson et al.
6,670,866	B2	12/2003	Ella et al.	7,187,254	B2	3/2007	Su et al.
6,677,929	B2	1/2004	Gordon et al.	7,199,683	B2	4/2007	Liu
6,693,500	B2	2/2004	Yang et al.	7,209,374	B2	4/2007	Noro
6,710,508	B2	3/2004	Ruby et al.	7,212,083	B2	5/2007	Inoue et al.
6,710,681	B2	3/2004	Figueredo et al.	7,212,085	B2	5/2007	Wu
6,713,314	B2	3/2004	Wong et al.	7,230,509	B2	6/2007	Stoemmer
6,714,102	B2	3/2004	Ruby et al.	7,230,511	B2	6/2007	Onishi et al.
6,720,844	B1	4/2004	Lakin	7,233,218	B2	6/2007	Park et al.
6,720,846	B2	4/2004	Iwashita et al.	6,262,637	B1	7/2007	Bradley et al.
6,724,266	B2	4/2004	Piazza et al.	7,242,270	B2	7/2007	Larson et al.
6,738,267	B1	5/2004	Navas Sabater et al.	7,259,498	B2	8/2007	Nakatsuka et al.
6,750,593	B2	6/2004	Iwata	7,268,647	B2	9/2007	Sano et al.
6,774,746	B2	8/2004	Whatmore et al.	7,275,292	B2	10/2007	Ruby et al.
6,777,263	B1	8/2004	Gan et al.	7,276,994	B2	10/2007	Takeuchi et al.
6,787,048	B2	9/2004	Bradley et al.	7,280,007	B2	10/2007	Feng et al.
6,788,170	B1	9/2004	Kaitila et al.	7,281,304	B2	10/2007	Kim et al.
6,803,835	B2	10/2004	Frank	7,294,919	B2	11/2007	Bai
6,812,619	B1	11/2004	Kaitila et al.	7,301,258	B2	11/2007	Tanaka
6,820,469	B1	11/2004	Adkins et al.	7,310,861	B2	12/2007	Aigner et al.
6,828,713	B2	12/2004	Bradley et al.	7,313,255	B2	12/2007	Machida et al.
6,842,088	B2	1/2005	Yamada et al.	7,332,985	B2	2/2008	Larson et al.
6,842,089	B2	1/2005	Lee	7,345,410	B2	3/2008	Grannen et al.
6,849,475	B2	2/2005	Kim	7,358,831	B2	4/2008	Larson et al.
6,853,534	B2	2/2005	Williams	7,367,095	B2	5/2008	Larson et al.
6,861,920	B2	3/2005	Ishikawa et al.	7,368,857	B2	5/2008	Tanaka
6,872,931	B2	3/2005	Liess et al.	7,369,013	B2	5/2008	Fazzio et al.
6,873,065	B2	3/2005	Haigh et al.	7,377,168	B2	5/2008	Liu
6,873,529	B2	3/2005	Ikuta	7,385,467	B2	6/2008	Stoemmer et al.
6,874,211	B2	4/2005	Bradley et al.	7,388,318	B2	6/2008	Yamada et al.
6,874,212	B2	4/2005	Larson	7,388,454	B2	6/2008	Ruby et al.
6,888,424	B2	5/2005	Takeuchi et al.	7,388,455	B2	6/2008	Larson
6,900,705	B2	5/2005	Nakamura et al.	7,391,286	B2	6/2008	Jamneala et al.
6,903,452	B2	6/2005	Ma et al.	7,400,217	B2	7/2008	Larson et al.
6,906,451	B2	6/2005	Yamada et al.	7,408,428	B2	8/2008	Larson
6,911,708	B2	6/2005	Park	7,414,349	B2	8/2008	Sasaki
6,917,261	B2	7/2005	Unterberger	7,414,495	B2	8/2008	Iwasaki et al.
6,924,583	B2	8/2005	Lin et al.	7,420,320	B2	9/2008	Sano et al.
6,924,717	B2	8/2005	Ginsburg et al.	7,423,503	B2	9/2008	Larson et al.
				7,425,787	B2	9/2008	Larson
				7,439,824	B2	10/2008	Aigner
				7,463,118	B2	12/2008	Jacobsen
				7,466,213	B2	12/2008	Lobl et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

7,482,737 B2 1/2009 Yamada et al.
 7,508,286 B2 3/2009 Ruby et al.
 7,515,018 B2 4/2009 Handtmann et al.
 7,535,324 B2 5/2009 Fattinger et al.
 7,545,532 B2 6/2009 Muramoto
 7,561,009 B2 7/2009 Larson et al.
 7,576,471 B1 8/2009 Solai
 7,602,101 B2 10/2009 Hara et al.
 7,619,493 B2 11/2009 Uno et al.
 7,629,865 B2 12/2009 Ruby
 7,642,693 B2 1/2010 Akiyama et al.
 7,655,963 B2 2/2010 Sadaka et al.
 7,684,109 B2 3/2010 Godshalk et al.
 7,714,684 B2 5/2010 Ruby et al.
 7,768,364 B2 8/2010 Hart et al.
 7,791,434 B2 9/2010 Fazzio et al.
 7,795,781 B2 9/2010 Barber et al.
 7,889,024 B2 2/2011 Bradley et al.
 8,188,810 B2 5/2012 Fazzio et al.
 8,248,185 B2 8/2012 Choy et al.
 8,283,999 B2 10/2012 Elbrecht et al.
 8,507,919 B2 8/2013 Ishikura
 8,575,820 B2 11/2013 Shirakawa et al.
 8,673,121 B2 3/2014 Larson et al.
 8,872,604 B2 10/2014 Burak et al.
 8,930,301 B2 1/2015 Traupman et al.
 9,136,818 B2 9/2015 Burak et al.
 9,136,819 B2 9/2015 Grannen et al.
 9,154,112 B2 10/2015 Burak
 2001/0026951 A1 10/2001 Vergani et al.
 2002/0000646 A1 1/2002 Gooch et al.
 2002/0063497 A1 5/2002 Panasik
 2002/0070463 A1 6/2002 Chang et al.
 2002/0126517 A1 9/2002 Matsukawa et al.
 2002/0140520 A1 10/2002 Hikita et al.
 2002/0190814 A1* 12/2002 Yamada et al. 333/187
 2003/0001251 A1 1/2003 Cheever et al.
 2003/0006502 A1 1/2003 Karpman
 2003/0011285 A1 1/2003 Ossman
 2003/0011446 A1 1/2003 Bradley
 2003/0051550 A1 3/2003 Nguyen et al.
 2003/0087469 A1 5/2003 Ma
 2003/0102776 A1 6/2003 Takeda et al.
 2003/0111439 A1 6/2003 Fetter et al.
 2003/0132493 A1 7/2003 Kang et al.
 2003/0132809 A1 7/2003 Senthilkumar et al.
 2003/0141946 A1 7/2003 Ruby et al.
 2003/0155574 A1 8/2003 Doolittle
 2003/0179053 A1 9/2003 Aigner et al.
 2004/0016995 A1 1/2004 Kuo et al.
 2004/0017130 A1 1/2004 Wang et al.
 2004/0056735 A1 3/2004 Nomura et al.
 2004/0092234 A1 5/2004 Pohjonen
 2004/0099898 A1 5/2004 Grivna et al.
 2004/0129079 A1 7/2004 Kato et al.
 2004/0150296 A1 8/2004 Park et al.
 2004/0166603 A1 8/2004 Carley
 2004/0195937 A1 10/2004 Shogo Matsubara et al.
 2004/0257171 A1 12/2004 Park et al.
 2005/0012716 A1 1/2005 Mikulin et al.
 2005/0023931 A1 2/2005 Bouche et al.
 2005/0036604 A1 2/2005 Scott et al.
 2005/0082626 A1 4/2005 Leedy
 2005/0093396 A1 5/2005 Larson et al.
 2005/0093655 A1 5/2005 Larson et al.
 2005/0093657 A1 5/2005 Larson et al.
 2005/0093658 A1 5/2005 Larson et al.
 2005/0167795 A1 8/2005 Higashi
 2005/0206271 A1 9/2005 Higuchi et al.
 2005/0206479 A1 9/2005 Nguyen et al.
 2005/0206483 A1 9/2005 Pashby et al.
 2005/0248232 A1 11/2005 Itaya et al.
 2005/0269904 A1 12/2005 Oka
 2006/0017352 A1 1/2006 Tanielian
 2006/0071736 A1 4/2006 Ruby et al.

2006/0081048 A1 4/2006 Mikado et al.
 2006/0087199 A1 4/2006 Larson et al.
 2006/0103492 A1 5/2006 Feng et al.
 2006/0119453 A1 6/2006 Fattinger et al.
 2006/0121686 A1 6/2006 Wei et al.
 2006/0125489 A1 6/2006 Feucht et al.
 2006/0132262 A1 6/2006 Fazzio et al.
 2006/0160353 A1 7/2006 Gueneau de Mussy et al.
 2006/0164183 A1 7/2006 Tikka et al.
 2006/0164186 A1 7/2006 Stoemmer et al.
 2006/0197411 A1 9/2006 Hoen et al.
 2006/0238070 A1 10/2006 Costa et al.
 2006/0284707 A1 12/2006 Larson et al.
 2006/0290446 A1 12/2006 Aigner et al.
 2007/0035364 A1 2/2007 Sridhar et al.
 2007/0037311 A1 2/2007 Izumi et al.
 2007/0085213 A1 4/2007 Anh et al.
 2007/0085632 A1 4/2007 Larson et al.
 2007/0086080 A1 4/2007 Larson et al.
 2007/0086274 A1 4/2007 Nishimura et al.
 2007/0090892 A1 4/2007 Larson
 2007/0170815 A1 7/2007 Unkrich
 2007/0171002 A1 7/2007 Unkrich
 2007/0176710 A1 8/2007 Jamneala et al.
 2007/0205850 A1 9/2007 Jamneala et al.
 2007/0279153 A1 12/2007 Ruby
 2008/0055020 A1 3/2008 Handtmann et al.
 2008/0297278 A1 12/2008 Handtmann et al.
 2008/0297279 A1 12/2008 Thalhammer et al.
 2008/0297280 A1 12/2008 Thalhammer et al.
 2009/0064498 A1 3/2009 Mok et al.
 2009/0079302 A1 3/2009 Wall et al.
 2009/0096550 A1 4/2009 Handtmann et al.
 2009/0127978 A1 5/2009 Asai et al.
 2009/0153268 A1 6/2009 Milson et al.
 2010/0013573 A1 1/2010 Umeda
 2010/0052176 A1 3/2010 Kamada et al.
 2010/0052815 A1 3/2010 Bradley et al.
 2010/0091370 A1 4/2010 Mahrt et al.
 2010/0102358 A1 4/2010 Lanzien et al.
 2010/0148637 A1 7/2010 Satou
 2010/0176899 A1 7/2010 Schaufele et al.
 2010/0180391 A1 7/2010 Larson et al.
 2010/0187948 A1 7/2010 Sinha et al.
 2010/0187949 A1 7/2010 Sinha et al.
 2010/0260453 A1 10/2010 Block
 2010/0327994 A1 12/2010 Choy et al.
 2012/0218056 A1 2/2011 Burak
 2012/0218055 A1 3/2011 Burak et al.
 2011/0092067 A1 4/2011 Bonilla et al.
 2011/0121689 A1 5/2011 Grannen et al.
 2011/0180391 A1 7/2011 Larson et al.
 2011/0204997 A1 8/2011 Elbrecht et al.
 2011/0266917 A1 11/2011 Metzger et al.
 2012/0177816 A1 7/2012 Larson et al.
 2012/0248941 A1 10/2012 Shirakawa et al.
 2012/0326807 A1 12/2012 Choy et al.
 2013/0003377 A1 1/2013 Sakai et al.
 2013/0106534 A1 5/2013 Burak et al.
 2013/0127300 A1 5/2013 Umeda et al.
 2013/0221454 A1 8/2013 Dunbar et al.
 2013/0334625 A1 12/2013 Lin
 2014/0118089 A1 5/2014 Bradley et al.
 2014/0132117 A1 5/2014 Larson et al.
 2015/0311046 A1 10/2015 Yeh et al.

FOREIGN PATENT DOCUMENTS

EP 231892 8/1987
 EP 0637875 2/1995
 EP 0689254 12/1995
 EP 0865157 9/1998
 EP 880227 11/1998
 EP 1047189 10/2000
 EP 1096259 5/2001
 EP 1100196 5/2001
 EP 1180494 2/2002
 EP 1249932 10/2002
 EP 1258989 11/2002

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	1258990	11/2002
EP	1517443	3/2005
EP	1517444	3/2005
EP	1528674	5/2005
EP	1528675	5/2005
EP	1528676	5/2005
EP	1528677	5/2005
EP	1542362	6/2005
EP	1557945	7/2005
EP	1575165	9/2005
EP	0973256	9/2006
EP	2299593	3/2011
GB	1207974	10/1970
GB	2013343	8/1979
GB	2411239	8/2005
GB	2418791	4/2006
GB	2427773	1/2007
JP	359023612	2/1984
JP	61054686	3/1986
JP	62109419	5/1987
JP	62200813	9/1987
JP	1295512	11/1989
JP	210907	1/1990
JP	06005944	1/1994
JP	8330878	12/1996
JP	09027729	1/1997
JP	983029	3/1997
JP	1032456	2/1998
JP	10173479	6/1998
JP	2000031552	1/2000
JP	2000232334	8/2000
JP	2000295065	10/2000
JP	2000332568	11/2000
JP	2001102901	4/2001
JP	2001508630	6/2001
JP	2002217676	8/2002
JP	2003017964	1/2003
JP	2003017974	1/2003
JP	2003505905	2/2003
JP	2003505906	2/2003
JP	2000076295	3/2003
JP	2003124779	4/2003
JP	2003332872	11/2003
JP	2006109472	4/2006
JP	2006295924	10/2006
JP	2006319796	11/2006
JP	2007006501	1/2007
JP	2007028669	2/2007
JP	2007295306	11/2007
KR	20030048917	6/2003
KR	100806504	2/2008
WO	WO9816957	4/1998
WO	WO9838736	9/1998
WO	WO9856049	12/1998
WO	WO9937023	7/1999
WO	WO0106646	1/2001
WO	WO0106647	1/2001
WO	WO0199276	12/2001
WO	WO02103900	12/2002
WO	WO03030358	4/2003
WO	WO03043188	5/2003
WO	WO03050950	6/2003
WO	WO03058809	7/2003
WO	W02004034579	4/2004
WO	W02004051744	6/2004
WO	W02004102688	11/2004
WO	W02005043752	5/2005
WO	W02005043753	5/2005
WO	W02005043756	5/2005
WO	W02006018788	2/2006

OTHER PUBLICATIONS

Martin, et al. "Re-growth of c-axis oriented AlN thin films", IEEE Ultrasonics Symposium, 2006, p. 169-172.

Martin, et al. "Shear Mode Coupling and Tilted Gram Growth of AlN Thin Films in BAW Resonators", IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, Jul. 2006, p. 1339-1343, vol. 53, No. 7.

Co-pending Application No. 13/161,946, filed Jun. 16, 2011.

Machine Translation of JP2003505905 published Feb. 12, 2003.

Machine Translation of JP2003505906 published Feb. 12, 2003.

Machine Translation of WO2004034579 published Apr. 22, 2004.

Machine Translation of WO2004102688 published Nov. 25, 2004.

Machine Translation of JP2006109472 published Apr. 20, 2006.

Machine Translation of JP2006295924 published Oct. 26, 2006.

Machine Translation of JP2007028669 published Feb. 1, 2007.

Machine Translation of JP2007006501 published Jan. 11, 2007.

Machine Translation of JP2006319796 published Nov. 11, 2006.

Machine Translation of JP2007295306 published Nov. 8, 2007.

Machine Translation of WO9838736 published Sep. 3, 1998.

Machine Translation of JP983029 published Mar. 28, 1997.

Machine Translation of JP8330878 published Dec. 13, 1996.

A partial copy of GB search report for Application No. GB0525884.3 Feb. 2, 2006, 4 pages.

British search report Application No. GB0605222.9 Jul. 11, 2006.

Examination report corresponding to application No. GB0605770.7 Aug. 25, 2006.

Examination report from UK for application GB0605971.1 Aug. 24, 2006.

Search report for Great Britain patent application No. 0617742.2 Dec. 13, 2006.

Search report for Great Britain Patent Application No. 0617742.2 Mar. 29, 2007.

Search report from corresponding application No. GB0605225.2 Jun. 26, 2006.

Search report from Corresponding Application No. GB0620152.9 Nov. 15, 2006.

Search report from Corresponding Application No. GB0620653.6 Nov. 17, 2006.

Search report from Corresponding Application No. GB0620655.1 Nov. 17, 2006.

Search report from Corresponding Application No. GB0620657.7 Nov. 23, 2006.

Examination report from Corresponding Application No. GB0605779.8 Aug. 23, 2006.

Search report in the Great Britain Patent Application No. GB0619698.4 Nov. 30, 2006.

Akiyama, et al., "Enhancement of Piezoelectric Response in Scandium Aluminum Nitride Alloy Thin Films Prepared by Dual Reactive Cosputtering", Advanced Materials, vol. 21, 2009, pp. 593-596.

Al-Ahmad, et al., "Piezoelectric-Based Tunable Microstrip Shunt Resonator", Proceedings of Asia-Pacific Microwave Conference, 2006.

Aoyama, et al., "Diffusion of Boron, Phosphorus, Arsenic and Antimony in Thermally Grown Silicon Dioxide", Journal of Electrochemical Society, vol. 146 (5), pp. 1879-1883, 1999.

Auld, "Acoustic Resonators", Acoustic Fields and Waves in Solids, Second Edition, vol. 2, 1990, pp. 250-259.

Bauer, et al., "Properties of Silicon Implanted with Boron Ions through Thermal Silicon Dioxide", Solid State Electronics, vol. 16, No. 3, 1973, pp. 289-300.

Bi, et al., "Bulk Acoustic Wave RF Technology", IEEE Microwave Magazine, vol. 9, Issue 5, 2008, pp. 65-80.

Choi, et al., "Design of Half-Bridge Piezo-Transformer Converters in the AC Adapter Applications", APEC 2005, IEEE, Mar. 2005, pp. 244-248.

Coombs, "Electronic Instrument Handbook", Second Edition, McGraw-Hill Inc., 1995, pp. 5.1-5.29.

C-S Lee, et al., "Copper-Airbridged Low-Noise GaAs PHEMT with Ti/Wnx/Ti Diffusion Barrier for High-Frequency Applications" IEEE Transactions on Electron Devices, vol. 53, Issue 8, 2006, pp. 1753-1758.

Denisse, et al., "Plasma-Enhanced Growth and Composition of Silicon Oxynitride Films", Journal of Applied Physics, vol. 60, No. 7, Oct. 1, 1986, pp. 2536-2542.

(56)

References Cited

OTHER PUBLICATIONS

- Fattinger, et al., "Coupled Bulk Acoustic Wave Resonator Filters: Key technology for single-to-balanced RF filters", IEEE MTT-S Digest, 2004, pp. 927-929.
- Fattinger, et al., "Single-to-balance Filters for Mobile Phones Using Coupled Resonator BAW Technology", 2004 IEEE Ultrasonics Symposium, Aug. 2004, pp. 416-419.
- Fattinger, et al., "Spurious Mode Suppression in Coupled Resonator Filters", IEEE MTT-S International Microwave Symposium Digest, 2005, pp. 409-412.
- Gilbert, "An Ultra-Miniature, Low Cost Single Ended to Differential Filter for ISM Band Applications", Microwave Symposium Digest, 2008 IEEE MTT-S, Jun. 2008, pp. 839-842.
- Grill, et al., "Ultralow-K Dielectrics Prepared by Plasma-Enhanced Chemical Vapor Deposition", Applied Physics Letters, vol. 79, 2001, pp. 803-805.
- Hadimioglu et al., "Polymer Films as Acoustic Matching Layers", 1990 IEEE Ultrasonics Symposium Proceedings, vol. 3, Dec. 1990, pp. 1337-1340.
- Hara, "Surface Treatment of Quartz Oscillator Plate by Ion Implantation", Oyo Buturi, vol. 47, No. 2, Feb. 1978, pp. 145-146.
- Holzlohner et al., "Accurate Calculation of Eye Diagrams and Bit Error Rates in Optical Transmission Systems Using Linearization", Journal of Lightwave Technology, vol. 20, No. 3, Mar. 2002, pp. 389-400.
- Ivensky, et al., "A Comparison of Piezoelectric Transformer AC/DC Converters with Current Doubler and voltage Doubler Rectifiers", IEEE Transactions on Power Electronics, vol. 19, No. 6, Nov. 2004.
- Jamneala, et al., "Coupled Resonator Filter with Single-Layer Acoustic Coupler", IEEE Transaction on Ultrasonics, Ferroelectrics, and Frequency Control, vol. 55, Oct. 2008, pp. 2320-2326.
- Jamneala, et al., "Ultra-Miniature Coupled Resonator Filter with Single-Layer Acoustic Coupler", IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, vol. 56, No. 11, Nov. 2009, pp. 2553-2558.
- Jiang, et al., "A Novel Single-Phase Power Factor Correction Scheme", IEEE, 1993, pp. 297-292.
- Jung, et al., "Experimental and Theoretical Investigation on the Relationship Between AlN Properties and AlN-Based FBAR Characteristics", 2003 IEEE International Frequency Control Symposium and PDA Exhibition Jointly with the 17th European Frequency and Time Forum Sep. 3, 2003, pp. 779-784.
- Kaitila, et al., "Measurement of Acoustical Parameters of Thin Films", 2006 IEEE Ultrasonics Symposium, Oct. 2006, pp. 464-467.
- Spangenberg et al., "Dependence of the Layer of Resistance of Boron Implantation in Silicon and the Annealing Conditions", Comptes Rendus de l'Academie Bulgares des Sciences, vol. 33, No. 3, 1980, pp. 325-327.
- Tas, et al., "Reducing Anchor Loss in Micromechanical Extensional Mode Resonators", IEEE Transactions on Ultrasonics, Ferroelectrics and Frequency Control, vol. 57, No. 2, Feb. 2010, pp. 448-454.
- Thomsen, et al., "Surface Generation and Detection of Phonons by Picosecond Light Pulses", Physical Review B, vol. 34, No. 6, Sep. 15 1986, pp. 4129-4138.
- Tiersten, et al., "An Analysis of Thickness-Extensional Trapped Energy Resonant Device Structures with Rectangular Electrodes in the Piezoelectric Thin Film on Silicon Configuration", Journal of Applied Physics, 54 (10), Oct. 1983, pp. 5893-5910.
- Topich, et al., "Effects of Ion Implanted Fluorine in Silicon Dioxide", Nuclear Instr. And Methods, Cecon Rec, Cleveland OH, May 1978, pp. 70-73.
- Tsubouchi, et al., "Zero Temperature coefficient Surface Acoustic Wave Devices using Epitaxial AlN Films", IEEE Ultrasonics Symposium, San Diego CA, 1982, pp. 240-245.
- Vasic, et al., "A New Method to Design Piezoelectric Transformer Used in MOSFET & IGBT Drive Circuits", IEEE 34th Annual Power Electronics Specialists Conference, 2003, vol. 1, Jun. 15-19, 2003, pp. 307-312.
- Vasic, et al., "A New MOSFET & IGBT Gate Drive Insulated by a Piezoelectric Transformer", IEEE 32nd Annual Power Electronics Specialists Conference, vol. 3, 2001, pp. 1479-1484.
- Yanagitani, et al., "Giant Shear Mode Electromechanical Coupling Coefficient k15 in C-Axis Tilted ScAlN Films", IEEE International Ultrasonics Symposium, Oct. 2010, pp. 2095-2098.
- Yang, et al., "Highly C Axis Oriented AlN Film Using MOCVD for 5GHz Band FBAR Filter", 2003 IEEE Ultrasonics Symposium, Oct. 5, 2003, pp. 170-173.
- Pensala, et al., "Spurious resonance suppression in gigahertz-range ZnO thin-film bulk acoustic wave resonators by the boundary frame method: modeling and experiment", IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, vol. 56, No. 8, Aug. 2009, pp. 1731-1744.
- Lynch, "Precise Measurements on Dielectric and Magnetic Materials", IEEE Transactions on Instrumentation and Measurement, vol. IM-23, No. 4, Dec. 1974, pp. 425-431.
- Ranjan, et al., "Strained Hexagonal ScN: A Material with Unusual Structural and Optical Properties", Physical Review Letters, vol. 90, No. 25, Jun. 27, 2003.
- Farrer, et al., "Properties of Hexagonal ScN versus wurtzite GaN and InN", Physical Review B 66, Nov. 20, 2002.
- Constantin, et al., "Composition-dependent structural properties in ScGaN alloy films: a combined experimental and theoretical study", Journal of Applied Physics, vol. 98, Dec. 16, 2005.
- Suzuki, et al., "Influence of shadowing effect on shear mode acoustic properties in the c-axis tilted Al films", IEEE Ultrasonics Symposium, Oct. 2010, pp. 1478-1481.
- Krishnaswamy, et al., "Film Bulk Acoustic Wave Resonator Technology", 1990 Ultrasonics Symposium, May 29, 1990, pp. 529-536. Machine translation of JP2003332872 published Nov. 21, 2003. A partial copy of GB search report for Application No. GB0522393.8 Jan. 9, 2006, 4 pages.
- Lakin, "Bulk Acoustic Wave Coupled Resonator Filters", 2002 IEEE International Frequency Control Symposium and PDA Exhibition, May 2002, pp. 8-14. Machine translation of KR20030048917 published Jun. 25, 2003. Machine translation of WO9937023 published Jul. 22, 1999. Machine translation of CN101170303 published Apr. 30, 2008. Machine translation of WO03030358 published Apr. 10, 2003. Machine translation of WO03043188 published May 22, 2003. Machine translation of WO03050950 published Jun. 19, 2003. Machine translation of DE10239317 published Mar. 11, 2004. Machine translation of JP2000232334 published Aug. 22, 2000. Machine translation of JP2000295065 published Oct. 20, 2000. Machine translation of JP2000031552 published Jan. 28, 2000. Machine translation of JP2000332568 published Nov. 30, 2000. Machine translation of JP2001102901 published Apr. 13, 2001. Machine translation of JP2001508630 published Jun. 26, 2001. Machine translation of JP2002217676 published Aug. 2, 2002. Machine translation of JP2003017964 published Jan. 17, 2003. Machine translation of JP2003124779 published Apr. 25, 2003. Machine translation of JP2003017974 published Jan. 17, 2003. Machine Translation of KR100806504 published Feb. 21, 2008. Machine Translation of WO02103900 published Dec. 27, 2002. Machine Translation of JP10173479 published Jun. 26, 1998. Machine Translation of KR20020050729 published Jun. 27, 2002. Machine Translation of JP2000076295 published Mar. 14, 2003.
- Lakin, "Coupled Resonator Filters", 2002 IEEE Ultrasonics Symposium, Mar. 2, 2002, pp. 901-908.
- Lakin, et al., "High Performance Stacked Crystal Filters for GPS and Wide Bandwidth Applications", 2001 IEEE Ultrasonics Symposium, Jan. 1, 2001, pp. 833-838.
- Lakin, et al., "Temperature Compensated Bulk Acoustic Thin Film Resonators", 2000 IEEE Ultrasonics Symposium San Juan Puerto Rico, Oct. 2000, pp. 855-858.
- Lakin, "Thin Film BAW Filters for Wide Bandwidth and High Performance Applications", IEEE Microwave Symposium Digest, 2004 MTT-S International, vol. 2, Jun. 6-11 2004, pp. 923-926.
- Lakin, "Thin Film Resonators and Filters", IEEE Ultrasonics Symposium, Caesar's Tahoe, NV, vol. 2, Oct. 1999, pp. 895-906.

(56)

References Cited

OTHER PUBLICATIONS

Lakin, et al., "Wide Bandwidth Thin Film BAW Filters", 2004 IEEE Ultrasonics, Ferroelectrics, and Frequency Control Joint 50th Anniversary Conference, vol. 1, Aug. 2004, pp. 407-410.

Larson, et al., "Measurement of Effective Kt_2, Q, Rp, Rs vs. Temperature for Mo/AlN FBAR Resonators", IEEE Ultrasonics Symposium, 2002, pp. 939-943.

Lee, et al., "Optimization of Frame-Like Film Bulk Acoustic Resonators for Suppression of Spurious Lateral Modes Using Finite Element Method", IEEE Ultrasonics Symposium, vol. 1, 2004, pp. 278-281.

Li, et al., "AC-DC Converter with Worldwide Range Input Voltage by Series and Parallel Piezoelectric Transformer Connection", 35th Annual IEEE Power Electronics Specialists Conference, 2004, pp. 2668-2671.

Lobl, et al., "Piezoelectric Materials for BAW Resonators and Filters", 2001 IEEE Ultrasonics Symposium, Jan. 1, 2001, pp. 807-811.

Loboda, "New Solutions for Intermetal Dielectrics Using Trimethylsilane-Based PECVD Processes", Microelectronics Eng., vol. 50, 2000, pp. 15-23.

Martin, et al., "Development of a Low Dielectric Constant Polymer for the Fabrication of Integrated Circuit Interconnect", IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, vol. 53, No. 7, Jul. 2006, pp. 1339-1343.

Martinez, et al., "High confinement suspended micro-ring resonators in silicon-on-insulator", Optics Express, vol. 14, No. 13, Jun. 26, 2006, pp. 6259-6263.

Navas, et al., "Miniaturised Battery Charger using Piezoelectric Transformers", Applied Power Electronics Conference and Exposition, 2001 Sixteenth Annual IEEE, vol. 1, pp. 492-496.

Ng, et al., "The Diffusion Ion-Implanted Boron in Silicon Dioxide", AIP Conf. Proceedings, No. 122, 1984, pp. 20-33.

Ohta, et al., "Temperature Characteristics of Solidly Mounted Piezoelectric Thin Film Resonators", IEEE Ultrasonics Symposium, Honolulu HI, Oct. 2003, pp. 2011-2015.

Pandey, et al., "Anchor Loss Reduction in Resonant MEMS using MESA Structures", Proceedings of the 2nd IEEE International Conference on Nano/Micro Engineered and Molecular Systems, Bangkok Thailand, Jan. 16-19, 2007, pp. 880-885.

Pang, et al., "High Q Single-Mode High-Tone Bulk Acoustic Resonator Integrated with Surface-Machined FBAR Filter", Microwave Symposium Digest, IEEE MTT-S International, 2005, pp. 413-416.

Parker, et al., "Temperature-Compensated Surface Acoustic-Wave Devices with SiO₂ Film Overlays", Journal of Applied Physics, vol. 50, Mar. 1979, pp. 1360-1369.

Pensala, "Thin film bulk acoustic wave devices: performance optimization and modeling", <http://www.vtt.fi/inf/pdf/publications/2011/P756.pdf>.

Reinhardt, et al., "Design of Coupled Resonator Filters Using Admittance and Scattering Matrices", 2003 IEEE Ultrasonics Symposium, May 3, 2003, pp. 1428-1431.

Ruby, "MicroMachined Thin Film Bulk Acoustic Resonators", IEEE International Frequency Control Symposium, 1994, pp. 135-138.

Ruby, et al., "The Effect of Perimeter Geometry on FBAR Resonator Electrical Performance", Microwave Symposium Digest, 2005 IEEE MTT-S International, Jun. 12, 2005, pp. 217-221.

Sanchez, et al., "Mixed Analytical and Numerical Design Method for Piezoelectric Transformers", IEEE Xplore, 2003, pp. 841-846.

Schoenholz, et al., "Plasma-Enhanced Deposition of Silicon Oxynitride Films", Thin Solid Films, 1987, pp. 285-291.

Schuessler, "Ceramic Filters and Resonators", Reprinted from IEEE Trans Sonics Ultrason., vol. SU-21, Oct. 1974, pp. 257-268.

Shirakawa, et al., "Bulk Acoustic Wave Coupled Resonator Filters Synthesis Methodology", 2005 European Microwave Conference, vol. 1, Oct. 2005.

Small, et al., "A De-Coupled Stacked Bulk Acoustic Resonator (DSBAR) Filter with 2 dB Bandwidth >4%", 2007 IEEE Ultrasonics Symposium, Oct. 2007, pp. 604-607.

* cited by examiner

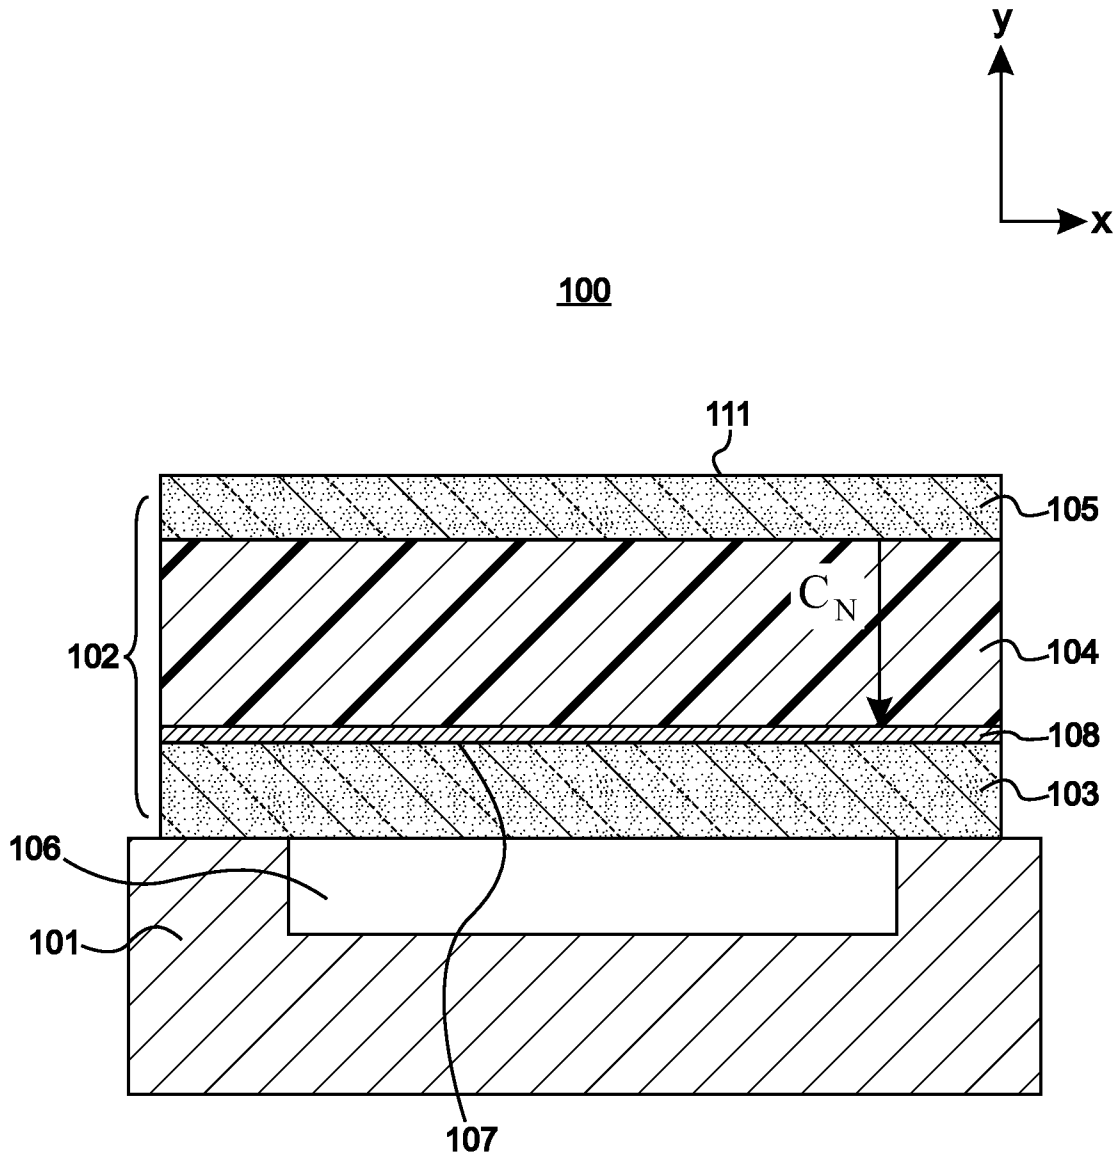


FIG. 1A

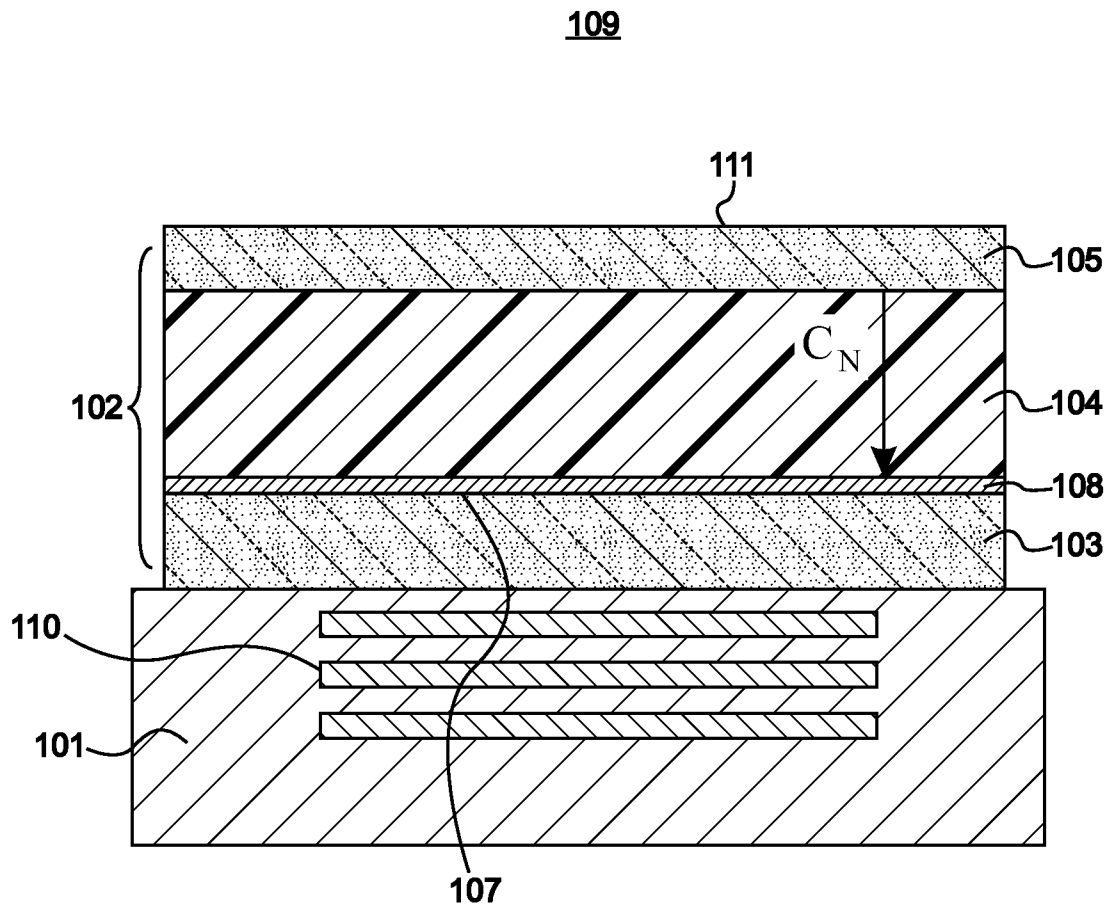


FIG. 1B

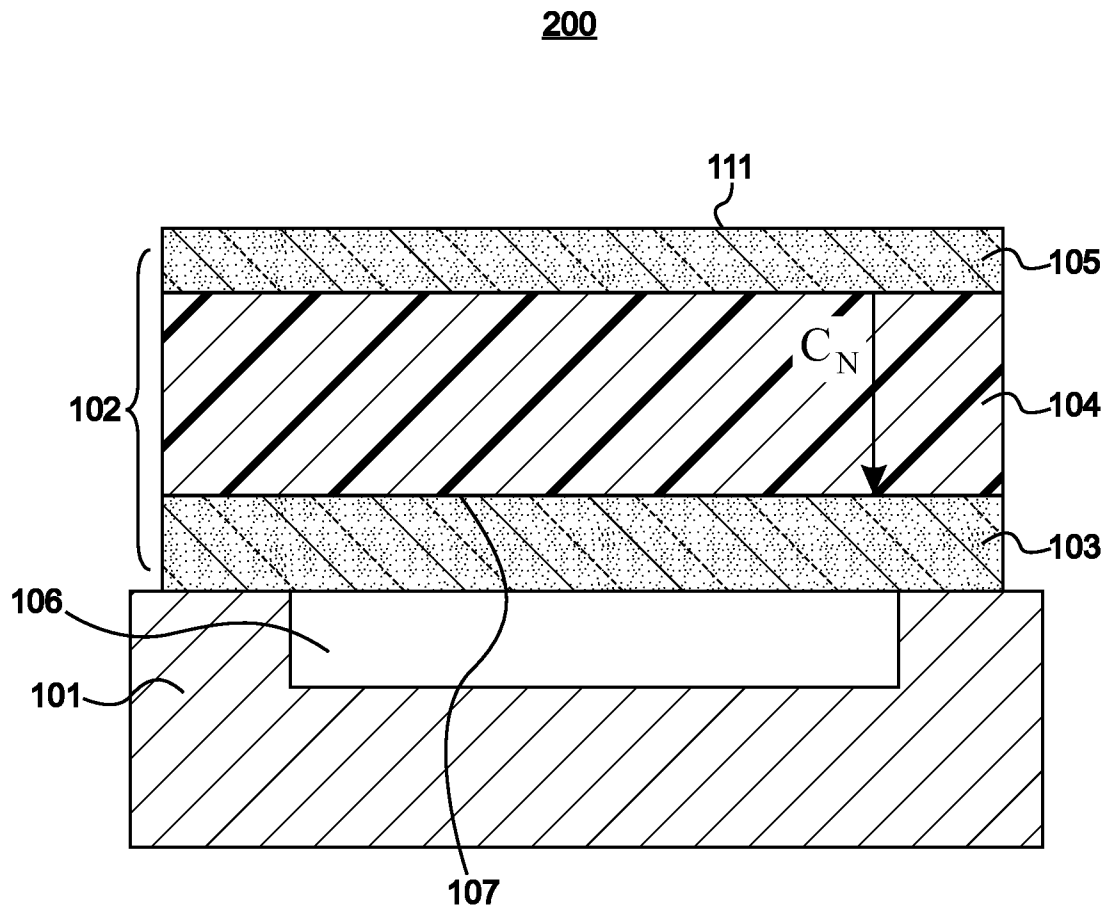


FIG. 2A

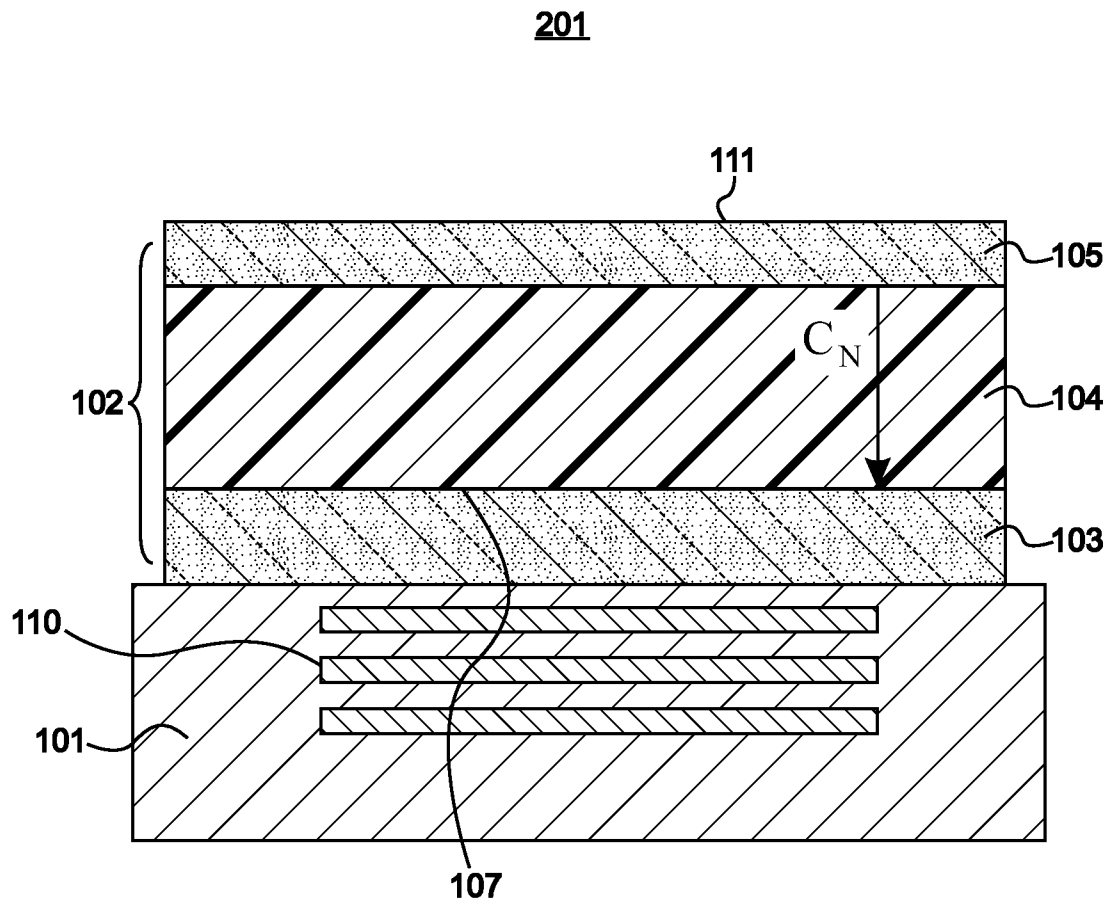


FIG. 2B

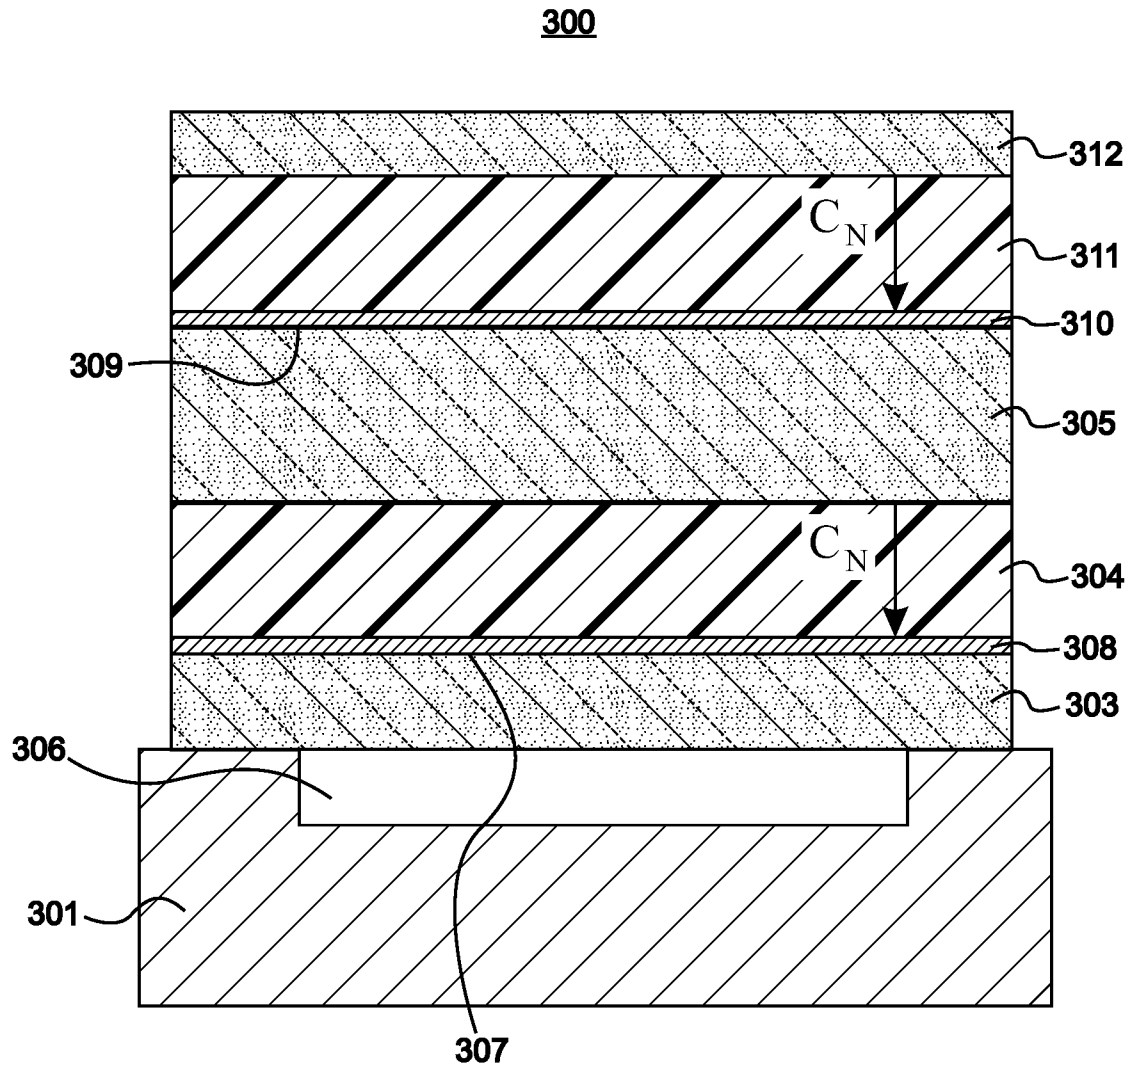


FIG. 3A

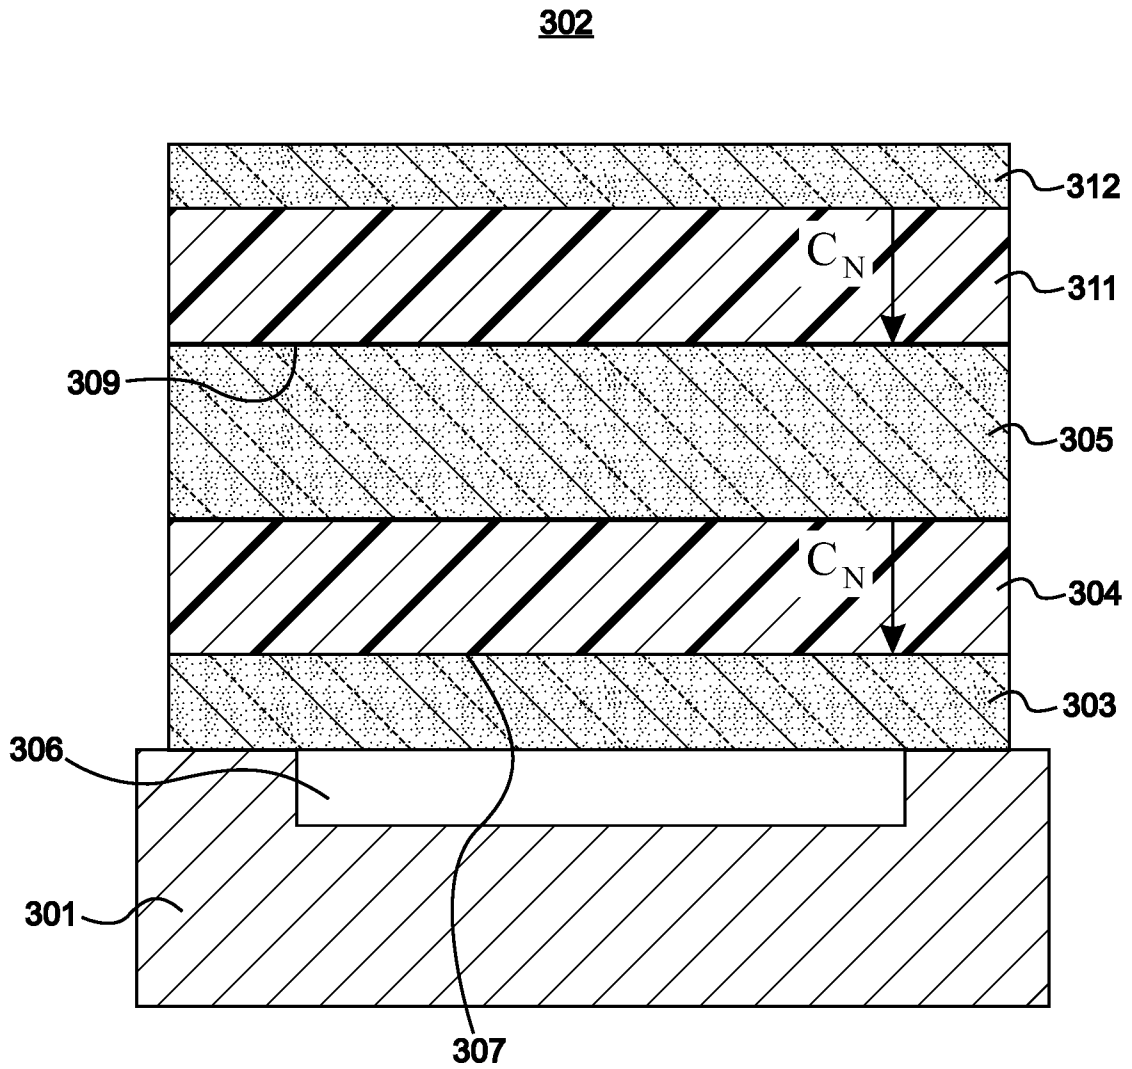


FIG. 3B

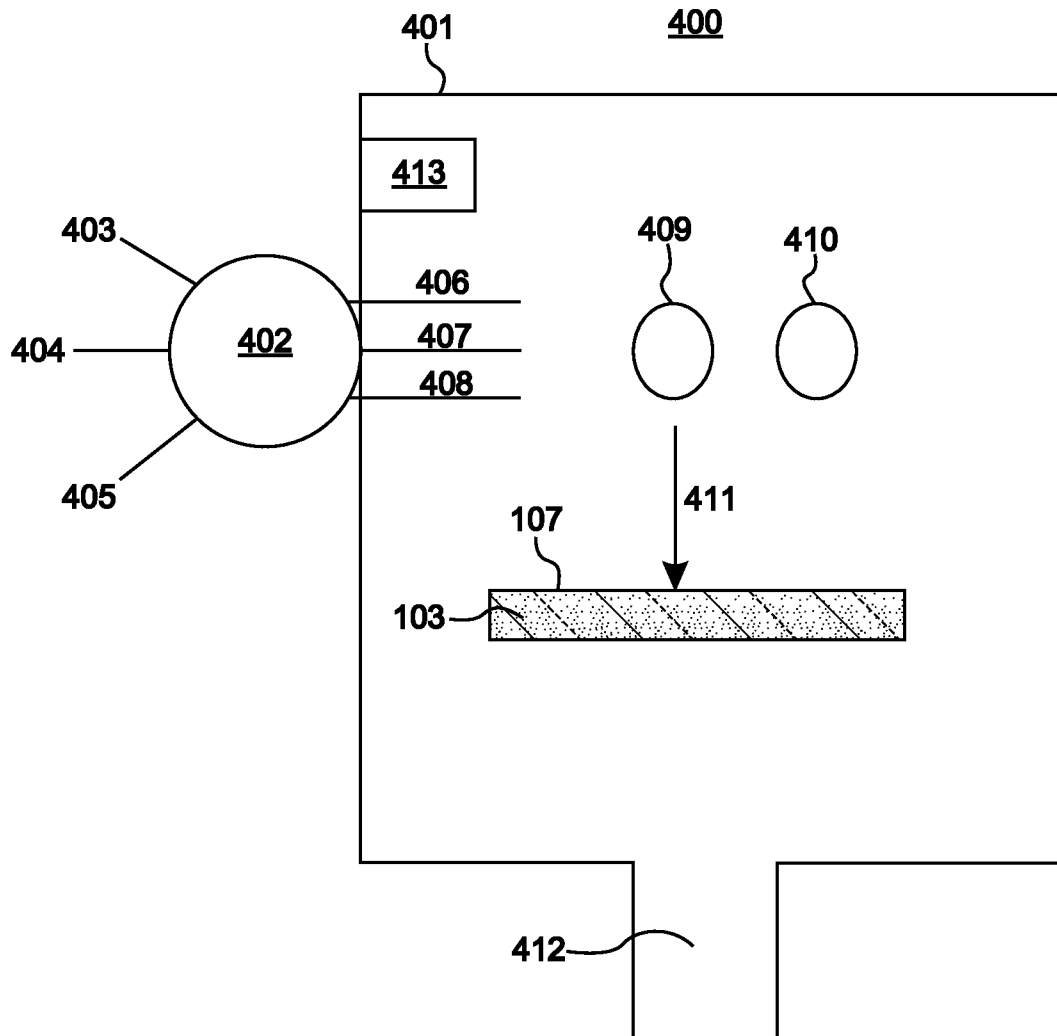


FIG. 4

500

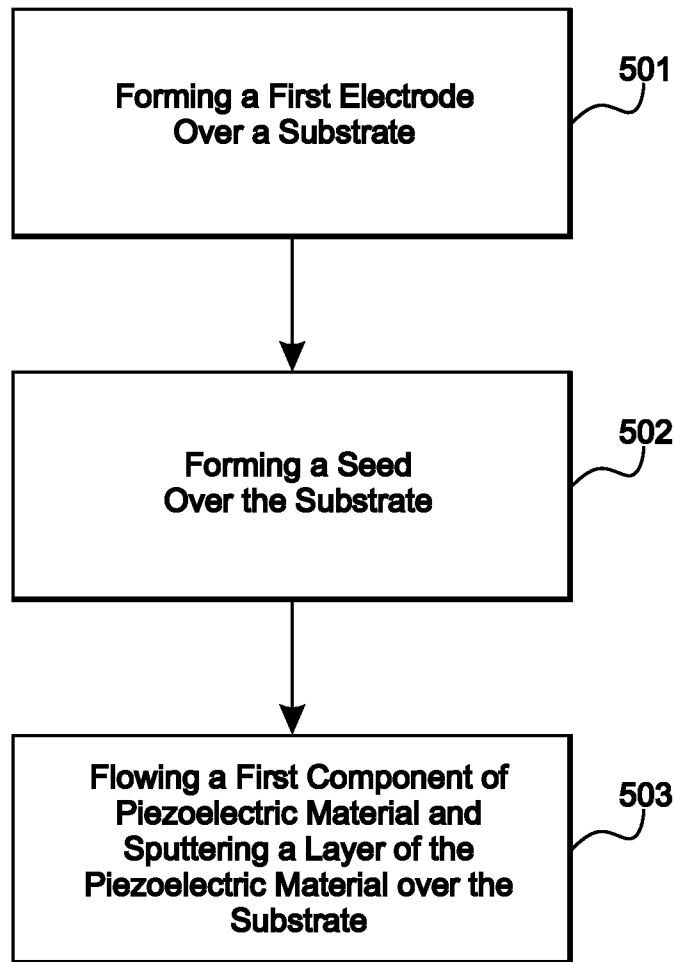


FIG. 5

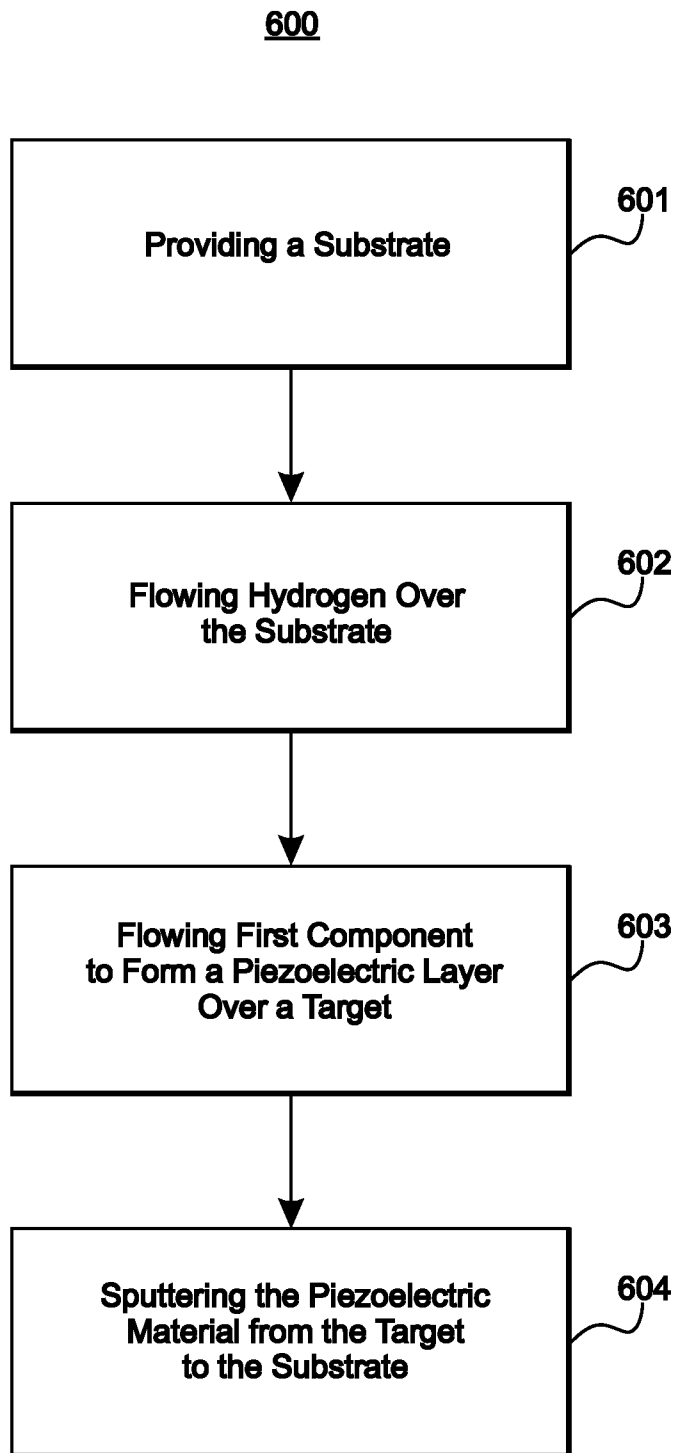


FIG. 6

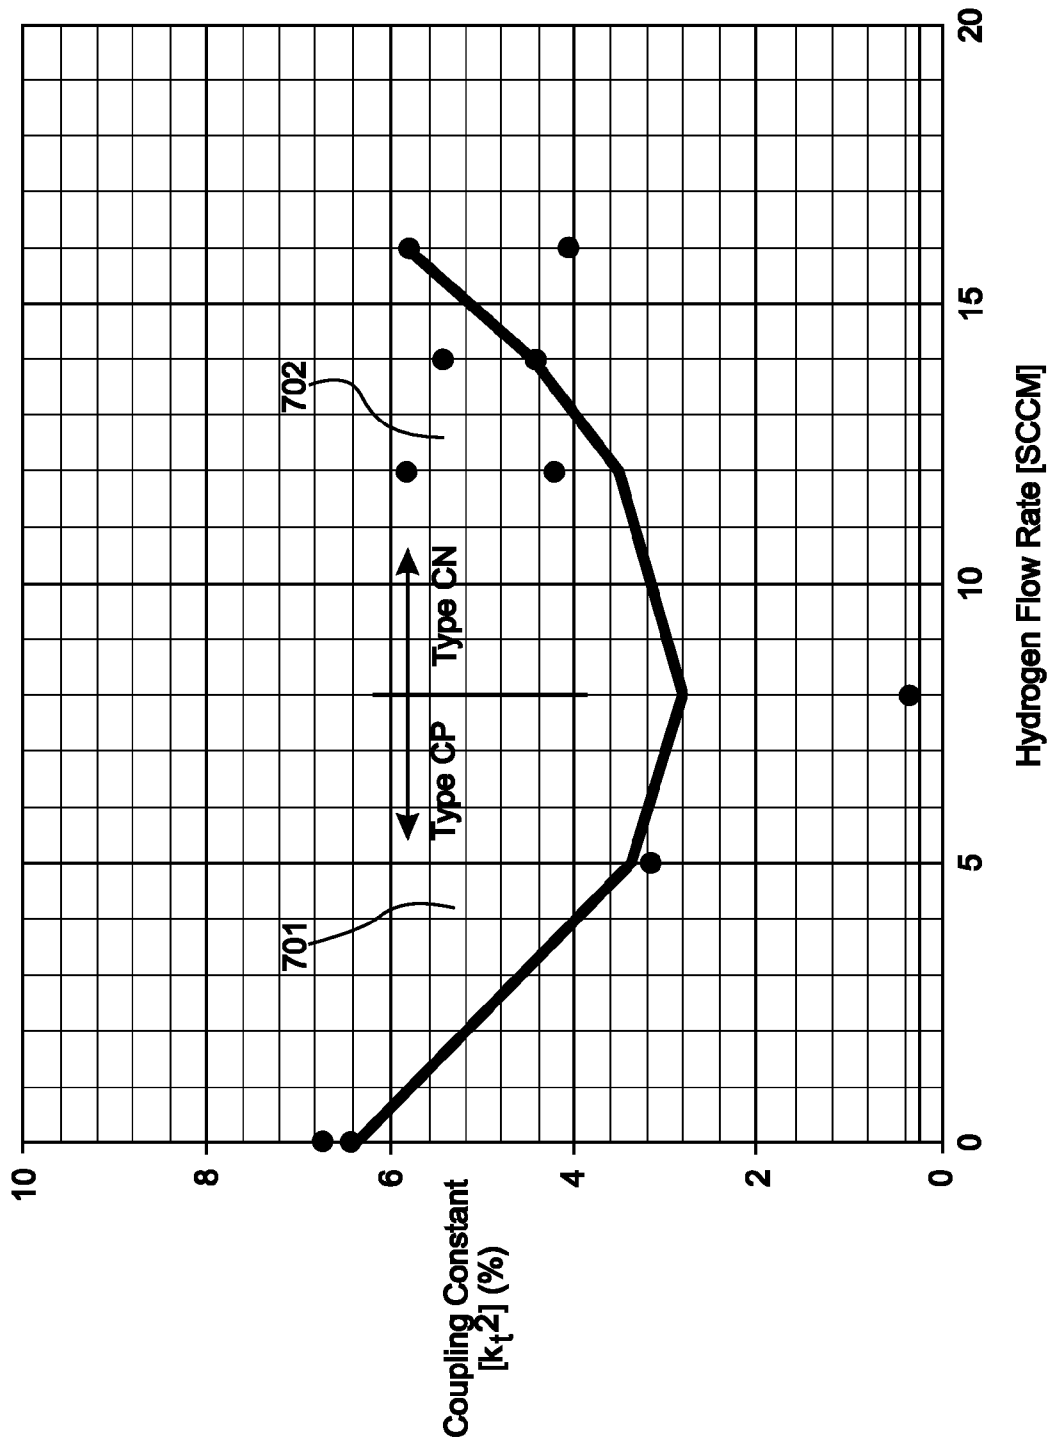


FIG. 7

METHOD OF FABRICATING PIEZOELECTRIC MATERIAL WITH SELECTED C-AXIS ORIENTATION

BACKGROUND

In many electronic applications, electrical resonators are used. For example, in many wireless communications devices, radio frequency (RF) and microwave frequency resonators are used as filters to improve reception and transmission of signals. Filters typically include inductors and capacitors, and more recently resonators.

As will be appreciated, it is desirable to reduce the size of components of electronic devices. Many known filter technologies present a barrier to overall system miniaturization. With the need to reduce component size, a class of resonators based on the piezoelectric effect has emerged. In piezoelectric-based resonators, acoustic resonant modes are generated in the piezoelectric material. These acoustic waves are converted into electrical waves for use in electrical applications.

One type of piezoelectric resonator is a Bulk Acoustic Wave (BAW) resonator. The BAW resonator includes an acoustic stack comprising, inter alia, a layer of piezoelectric material disposed between two electrodes. Acoustic waves achieve resonance across the acoustic stack, with the resonant frequency of the waves being determined by the materials in the acoustic stack. One type of BAW resonator comprises a piezoelectric film for the piezoelectric material. These resonators are often referred to as Film Bulk Acoustic Resonators (FBAR).

FBARs are similar in principle to bulk acoustic resonators such as quartz, but are scaled down to resonate at GHz frequencies. Because the FBARs have thicknesses on the order of microns and length and width dimensions of hundreds of microns, FBARs beneficially provide a comparatively compact alternative to certain known resonators.

FBARs may comprise a membrane (also referred to as the acoustic stack) disposed over air. Often, such a structure comprises the membrane suspended over a cavity provided in a substrate over which the membrane is suspended. Other FBARs may comprise the membrane formed over an acoustic mirror formed in the substrate. Regardless of whether the membrane is formed over air or over an acoustic mirror, the membrane comprises a piezoelectric layer disposed over a first electrode, and a second electrode disposed over the piezoelectric layer.

The piezoelectric layer comprises a crystalline structure and a polarization axis. Piezoelectric materials either compress or expand upon application of a voltage. By convention, a piezoelectric material that compresses when a voltage of a certain polarity is applied is referred to as compression-positive (C_P) material, whereas a piezoelectric material that expands upon application of the voltage is referred to as a compression-negative (C_N) material. The polarization axis of C_P piezoelectric materials is antiparallel to the polarization axis C_N material.

An FBAR is a polarity-dependent device as a result of polarity dependence of the piezoelectric material that constitutes part of the FBAR. A voltage of a given polarity applied between the electrodes of the FBAR will cause the thickness of the FBAR to change in a first direction, whereas the same voltage of the opposite polarity will cause the thickness of the FBAR to change in a second direction, opposite the first direction. (The thickness of the FBAR is the dimension of the FBAR between the electrodes.) For example, a voltage of the given polarity will cause the thickness of the FBAR to increase whereas a voltage of the opposite polarity will cause

the FBAR to decrease. Similarly, a mechanical stress applied to the FBAR that causes the thickness of the FBAR to change in a first direction will generate a voltage of the given polarity between the electrodes of the FBAR, whereas a mechanical stress that causes the thickness of the FBAR to change in a second direction, opposite the first direction, will generate a voltage of the opposite polarity between the electrodes of the FBAR. As such, a mechanical stress applied to the FBAR that causes the thickness of the FBAR to increase will generate a voltage of the given polarity, whereas a mechanical stress that causes the thickness of the FBAR to decrease will generate a voltage of the opposite polarity.

The piezoelectric layer of an FBAR is often grown over a first electrode and beneath a second electrode. The orientation of the C-axis can be governed by the first layer formed over the first electrode. For example, in growing aluminum nitride (AlN) with a C_P film orientation, the formation of a native oxide layer over the first electrode (e.g., Mo) is believed to cause the first layer of the piezoelectric crystal to be Al. Ultimately, the crystalline orientation of the AlN formed results in piezoelectric film's having C_P orientation and its attendant properties. Growth of C_N piezoelectric layers (e.g., AlN) by known methods has proven to be more difficult. It is believed that nitrogen and oxygen may be adsorbed at the surface of the first electrode, with the forming of a layer of Al over this adsorbed material. As such, rather than forming the desired C_N piezoelectric layer, C_P piezoelectric material is formed.

In certain applications, it is desirable to be able to select the orientation of the piezoelectric material, and to fabricate both C_P piezoelectric material and C_N piezoelectric material on the same structure. For example, in certain applications it is useful to provide a single-ended input to a differential output. One known resonator structure having a differential output comprises coupled mode resonators. Filters based on coupled mode acoustic resonators are often referred to as coupled mode resonator filters (CRFs). CRFs have been investigated and implemented to provide improved passband and isolation of the transmit band and receive band of duplexers, for example. One topology for CRFs comprises an upper FBAR and a lower FBAR. The two electrodes of one of the FBARs comprise the differential outputs, and one of the inputs to the lower resonator provides the single-ended input. The second electrode provides the ground for the device. However, while the stacked-FBAR CRF shows promise from the perspective of improved performance and reduced area or footprint due to its vertical nature, in order to attain this structure, the orientation of the compression axes (C-axes) of individual piezoelectric materials must be tailored to the application. For example, it may be useful to have one piezoelectric layer with its C-axis (e.g., C_N) in one direction, and the second piezoelectric layer to have its crystalline orientation anti-parallel (e.g., C_P) to the C-axis of the first piezoelectric layer. Unfortunately, and as alluded to above, using known methods of fabricating piezoelectric layers, it is difficult to select the orientation of the piezoelectric crystal during fabrication, and especially on the same wafer.

What is needed, therefore, is a method of fabricating piezoelectric materials that overcomes at least the known shortcomings described above.

SUMMARY

In accordance with a representative embodiment, a method of fabricating a piezoelectric material comprising a first component and a second component comprises: providing a substrate; flowing hydrogen over the substrate; flowing the first

component to form the piezoelectric material over a target; and sputtering the piezoelectric material from the target on the substrate.

In accordance with another representative embodiment, a method of fabricating a bulk acoustic wave (BAW) resonator comprises: forming a first electrode over a substrate; forming a seed layer over the substrate; depositing a piezoelectric material having a compression-negative (C_N) polarity, the depositing comprising: flowing a first component of the piezoelectric material to form the piezoelectric material over a target comprising a second component of the piezoelectric material; and sputtering the piezoelectric material from the target to the substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

The illustrative embodiments are best understood from the following detailed description when read with the accompanying drawing figures. It is emphasized that the various features are not necessarily drawn to scale. In fact, the dimensions may be arbitrarily increased or decreased for clarity of discussion. Wherever applicable and practical, like reference numerals refer to like elements.

FIG. 1A shows a bulk acoustic wave (BAW) resonator fabricated in accordance with a representative embodiment.

FIG. 1B shows a BAW resonator fabricated in accordance with a representative embodiment.

FIG. 2A shows a BAW resonator fabricated in accordance with a representative embodiment.

FIG. 2B shows a BAW resonator fabricated in accordance with a representative embodiment.

FIG. 3A shows a BAW resonator fabricated in accordance with a representative embodiment.

FIG. 3B shows a BAW resonator fabricated in accordance with a representative embodiment.

FIG. 4 shows a simplified schematic diagram of a deposition system in accordance with a representative embodiment.

FIG. 5 shows a flow-chart of a method of fabricating a piezoelectric layer in accordance with a first representative embodiment.

FIG. 6 shows a flow-chart of a method of fabricating a piezoelectric layer in accordance with a second representative embodiment.

FIG. 7 shows a graph of the coupling coefficient versus hydrogen flow rate during the forming of a piezoelectric layer.

DEFINED TERMINOLOGY

It is to be understood that the terminology used herein is for purposes of describing particular embodiments only, and is not intended to be limiting. The defined terms are in addition to the technical and scientific meanings of the defined terms as commonly understood and accepted in the technical field of the present teachings.

As used in the specification and appended claims, the terms ‘a’, ‘an’ and ‘the’ include both singular and plural referents, unless the context clearly dictates otherwise. Thus, for example, ‘a device’ includes one device and plural devices.

As used in the specification and appended claims, and in addition to their ordinary meanings, the terms ‘substantial’ or ‘substantially’ mean to with acceptable limits or degree. For example, ‘substantially cancelled’ means that one skilled in the art would consider the cancellation to be acceptable.

As used in the specification and the appended claims and in addition to its ordinary meaning, the term ‘approximately’ means to within an acceptable limit or amount to one having

ordinary skill in the art. For example, ‘approximately the same’ means that one of ordinary skill in the art would consider the items being compared to be the same.

DETAILED DESCRIPTION

In the following detailed description, for purposes of explanation and not limitation, specific details are set forth in order to provide a thorough understanding of illustrative embodiments according to the present teachings. However, it will be apparent to one having ordinary skill in the art having had the benefit of the present disclosure that other embodiments according to the present teachings that depart from the specific details disclosed herein remain within the scope of the appended claims. Moreover, descriptions of well-known apparatus and methods may be omitted so as to not obscure the description of the illustrative embodiments. Such methods and apparatus are clearly within the scope of the present teachings.

Generally, it is understood that the drawings and the various elements depicted therein are not drawn to scale. Further, relative terms, such as “above,” “below,” “top,” “bottom,” “upper” and “lower” are used to describe the various elements’ relationships to one another, as illustrated in the accompanying drawings. It is understood that these relative terms are intended to encompass different orientations of the device and/or elements in addition to the orientation depicted in the drawings. For example, if the device were inverted with respect to the view in the drawings, an element described as “above” another element, for example, would now be below that element.

Certain aspects of the present teachings are relevant to components of FBAR devices, FBAR-based filters, their materials and their methods of fabrication. Many details of FBARs, materials thereof and their methods of fabrication may be found in one or more of the following U.S. Patents and Patent Applications: U.S. Pat. No. 6,107,721, to Lakin; U.S. Pat. Nos. 5,587,620, 5,873,153 and 6,507,983 to Ruby, et al.; U.S. patent application Ser. No. 11/443,954, entitled “Piezoelectric Resonator Structures and Electrical Filters” to Richard C. Ruby, et al.; U.S. patent application Ser. No. 10/990,201, entitled “Thin Film Bulk Acoustic Resonator with Mass Loaded Perimeter” to Hongjun Feng, et al.; and U.S. patent application Ser. No. 11/713,726, entitled “Piezoelectric Resonator Structures and Electrical Filters having Frame Elements” to Jameala, et al.; and U.S. patent application Ser. No. 11/159,753, entitled “Acoustic Resonator Performance Enhancement Using Alternating Frame Structure” to Richard C. Ruby, et al. The disclosures of these patents and patent applications are specifically incorporated herein by reference. It is emphasized that the components, materials and method of fabrication described in these patents and patent applications are representative and other methods of fabrication and materials within the purview of one of ordinary skill in the art are contemplated.

Generally, the present teachings relate to a method of fabricating a piezoelectric layer comprising a selected C-axis orientation (i.e., polarity). In certain embodiments a piezoelectric material fabricated according to representative embodiments comprises a C_N polarity (also referred to as type- C_N piezoelectric material), whereas another piezoelectric material fabricated over the same substrate comprises a C_P polarity (also referred to as type- C_P piezoelectric material). In other embodiments, more than two or more piezoelectric layers are fabricated according to representative embodiments comprise C_N polarity. Furthermore, in representative embodiments the piezoelectric material comprises

AlN. It is emphasized that this is merely illustrative, and that the fabrication of other types of piezoelectric materials is contemplated, including but not limited to the fabrication of zinc oxide (ZnO) and lead zirconium titanate (PZT).

Applications of the illustrative methods will be appreciated by one having ordinary skill in the art. Some of these applications include FBARs useful in transformer applications and FBARs useful in filter applications. For example, the method of fabrication piezoelectric materials comprising antiparallel C-axes (e.g., C_N polarity and C_P polarity) may be useful on the fabrication of film acoustic transformers, such as described in commonly owned U.S. Pat. Nos. 6,987,433 and 7,091,649, to Larson, III, et al. Moreover, the method of fabrication piezoelectric materials comprising antiparallel C-axes (e.g., C_N polarity and C_P polarity) or parallel C-axes (e.g., both C_N polarity) may be useful in the fabrication of the stacked thin film bulk acoustic resonators (SBARs). SBARs comprise stacking two or more layers of piezoelectric material with electrodes between the piezoelectric layers and on the top and bottom of the stack. Such SBARs are described, for example in commonly owned U.S. Pat. Nos. 5,587,620 and 6,060,818, to Ruby, et al. Furthermore, the method of fabricating piezoelectric materials comprising antiparallel C-axes (e.g., C_N polarity and C_P polarity) or both comprising C_N polarity may be useful in CRF applications, such as described in commonly-owned U.S. patent application Ser. No. 12/201,641 entitled "Single Cavity Acoustic Resonators and Electrical Filters Comprising Single Cavity Acoustic Resonators" filed on Aug. 29, 2008 to Bradley, et al.; and in commonly owned U.S. Pat. No. 7,515,018 to Handtmann, et al. The disclosures of U.S. Pat. Nos. 5,587,620; 6,060,818; 6,987,433; 7,091,649; and 7,515,018 and the disclosure of U.S. patent application Ser. No. 12/201,641 are specifically incorporated herein by reference. It is emphasized that the noted applications are intended merely to illustrate applications of the methods of the present teachings, and that the application of the methods of fabricating piezoelectric materials of the present teachings are not limited to these illustrative applications.

FIG. 1A shows a simplified cross-sectional view of an FBAR 100 in accordance with a representative embodiment. An acoustic stack 102 is provided over a substrate 101 and comprises a first electrode 103 disposed over the substrate 101; a piezoelectric layer 104 disposed over the first electrode 103; and a second electrode 105 disposed over the piezoelectric layer 104. The piezoelectric layer 104 is a type- C_N piezoelectric material, and is illustratively type- C_N aluminum nitride (AlN). The substrate 101 illustratively comprises single-crystal silicon (Si).

A cavity 106 is formed in the substrate 101 beneath the first electrode 103 by a known method. The first electrode 103 and the second electrode 105 may be one of a variety of conductive materials, such as metals suitable as electrodes in BAW applications. Generally, materials suitable for the first electrode 103 and the second electrode 105 comprise Refractory metals. Transition metals or Noble Metals. In specific embodiments, the first and second electrodes 103, 105 illustratively comprise one or more of molybdenum (Mo), aluminum (Al), tungsten (W), platinum (Pt), ruthenium (Ru), niobium (Nb), hafnium (Hf) and uranium-238 (U-238), or other low-loss metals, and are fabricated using a known method. The piezoelectric layer 104 is fabricated in accordance with the present teachings.

In a representative embodiment, the FBAR 100 comprises a seed layer 108 disposed over an upper surface 107 of the first electrode 103. As described more fully below, the seed layer 108 is illustratively Al and fosters growth of piezoelectric

layer 104 of type- C_N AlN. In a representative embodiment, the seed layer 108 has a thickness in the range of approximately 50 Å to approximately 1000 Å over the upper surface 107. In other representative embodiments described below, the seed layer 108 is not provided over the first electrode 103. Rather, the type- C_N piezoelectric layer 104 is formed over the upper surface 107 of the first electrode 103 by methods of representative embodiments.

FIG. 1B shows a simplified cross-sectional view of an FBAR 109 in accordance with another representative embodiment. The acoustic stack 102 is provided over the substrate 101 and comprises the first electrode 103 disposed over the substrate 101; the piezoelectric layer 104 disposed over the first electrode 103; and the second electrode 105 disposed over the piezoelectric layer 104. The substrate 101 illustratively comprises single-crystal silicon (Si), and comprises an acoustic isolator 110 formed therein and disposed beneath the first electrode 103. The acoustic isolator 110 may be a known acoustic mirror comprising layers of alternating high acoustic impedance material and low impedance material. The piezoelectric layer 104 illustratively comprises AlN, and is a type- C_N material fabricated in accordance with the present teachings.

In a representative embodiment, the FBAR 109 comprises the seed layer 108 disposed over an upper surface 107 of the first electrode 103. The seed layer 108 has a thickness in the range of approximately 50 Å to approximately 1000 Å over the upper surface 107. In other representative embodiments described below, the seed layer 108 is not provided over the first electrode 103. Rather, the type- C_N piezoelectric layer 104 is formed over the upper surface 107 of the first electrode 103 by methods of representative embodiments.

FIG. 2A shows a simplified cross-sectional view of an FBAR 200 in accordance with a representative embodiment. The acoustic stack 102 is provided over the substrate 101 and comprises the first electrode 103 disposed over the substrate 101; the piezoelectric layer 104 disposed over the first electrode 103; and the second electrode 105 disposed over the piezoelectric layer 104. The piezoelectric layer 104 is a type- C_N piezoelectric material, and is illustratively type- C_N aluminum nitride (AlN). The substrate 101 illustratively comprises single-crystal silicon (Si).

The cavity 106 is formed in the substrate 101 beneath the first electrode 103 by a known method. The first electrode 103 and the second electrode 105 may be one of a variety of conductive materials as noted above, and are fabricated using a known method. The piezoelectric layer 104 is fabricated in accordance with the present teachings.

In a representative embodiment, and unlike the FBAR 100, FBAR 200 does not comprise the seed layer 108 over the upper surface 107 of the first electrode 103. Rather, the type- C_N piezoelectric layer 104 is formed over the upper surface 107 of the first electrode 103 by methods of representative embodiments described below.

FIG. 2B shows a simplified cross-sectional view of an FBAR 201 in accordance with a representative embodiment. The acoustic stack 102 is provided over the substrate 101 and comprises the first electrode 103 disposed over the substrate 101; the piezoelectric layer 104 disposed over the first electrode 103; and the second electrode 105 disposed over the piezoelectric layer 104. The substrate 101 illustratively comprises single-crystal silicon (Si), and comprises the acoustic isolator 110 formed therein and disposed beneath the first electrode 103. The acoustic isolator 110 may be a known acoustic mirror comprising layers of alternating high acoustic impedance material and low impedance material. The first electrode 103 and the second electrode 105 may be one of a

variety of conductive materials as noted above, and are fabricated using a known method. The piezoelectric layer **104** is fabricated in accordance with the present teachings.

In a representative embodiment, and unlike FBAR **109** shown in FIG. 1B, the FBAR **201** does not comprise the seed layer **108** over the first electrode **103**. Rather, the type- C_N piezoelectric layer **104** is formed over the upper surface **107** of the first electrode **103** by methods of representative embodiments described below.

FIG. 3A shows a simplified cross-sectional view of a BAW resonator **300** in accordance with a representative embodiment. The BAW resonator **300** comprises a single cavity such as described in commonly-owned U.S. patent application Ser. No. 12/201,641 to Bradley, et al. The BAW resonator **300** comprises a first electrode **303** disposed over a substrate **301**; a first piezoelectric layer **304** disposed over the first electrode **303**; and a second electrode **305** disposed over the first piezoelectric layer **304**. In the representative embodiment, the first piezoelectric layer **304** is a type- C_N piezoelectric material, and is illustratively type- C_N aluminum nitride (AlN). The substrate **301** illustratively comprises single-crystal silicon (Si).

A second piezoelectric layer **311** is disposed over the second electrode **305**; and a third electrode **312** is disposed over the second piezoelectric layer **311**. The second piezoelectric layer **311** is a type- C_N piezoelectric material, and is illustratively type- C_N aluminum nitride (AlN). A cavity **306** is formed in the substrate **301** beneath the first electrode **303** by a known method. The cavity **306** provides acoustic isolation as described above. Alternatively, an acoustic isolator (not shown in FIG. 3A) such as described above and comprising alternating layers of comparatively high and low acoustic impedance may be used instead of the cavity **306**.

The first electrode **303**, the second electrode **305** and the third electrode **312** may be one of a variety of conductive materials, such as metals suitable as electrodes in BAW applications. Generally, materials suitable for the first electrode **103** and the second electrode **105** comprise Refractory metals, Transition metals or Noble Metals. In specific embodiments, the first and second electrodes **103**, **105** illustratively comprise one or more of molybdenum (Mo), aluminum (Al), tungsten (W), platinum (Pt), ruthenium (Ru), niobium (Nb), hafnium (Hf) and uranium-238 (U-238), or other low-loss metals, and are fabricated using a known method. The piezoelectric layer **104** is fabricated in accordance with the present teachings.

In a representative embodiment, the FBAR **300** comprises a first seed layer **308** disposed over an upper surface **307** of the first electrode **303**; and a second seed layer **310** disposed over an upper surface **309** of the second electrode **305**. As described more fully below, the first and second seed layers **308**, **310** are illustratively Al and foster growth of the first and second piezoelectric layers **304**, **311** both of type- C_N AlN. In a representative embodiment, the first and second seed layers **308**, **310** each have a thickness in the range of approximately 50 Å to approximately 1000 Å.

It is appreciated that the FBAR **300** of the representative embodiment comprises an acoustic stack comprising more than one type C_N piezoelectric layer. It is emphasized that other BAW resonator structures comprising an acoustic stack comprising more than one type C_N piezoelectric layer are contemplated. For example, decoupled stacked acoustic resonators comprising more than one FBAR with an acoustic decoupler disposed therebetween are contemplated. In such an embodiment, each of the FBARs would include a type C_N piezoelectric layer fabricated in accordance with the present teachings. The present teachings contemplate forming the

piezoelectric layers with C_N axes by providing a seed layer over a surface of respective electrodes and forming the respective piezoelectric layer thereover.

Furthermore, in certain BAW structures comprising an acoustic resonator comprising more than one piezoelectric layer, it is desirable to provide piezoelectric layers comprising anti-parallel C -axes (e.g., one type C_N piezoelectric layer, and one type C_P piezoelectric layer). The present teachings also contemplate forming the piezoelectric layers with C_N axes by providing a seed layer over the surface of an electrode, forming the type C_N piezoelectric layer over the seed layer and forming a type C_P piezoelectric layer over another electrode. The type C_P piezoelectric layer is formed using a known method.

FIG. 3B shows a simplified cross-sectional view of a BAW resonator **302** in accordance with a representative embodiment. The BAW resonator **302** comprises a single cavity such as described in commonly-owned U.S. patent application Ser. No. 12/201,641 to Bradley, et al. The BAW resonator **302** comprises first electrode **303** disposed over substrate **301**; first piezoelectric layer **304** disposed over the first electrode **303**; and second electrode **305** disposed over the first piezoelectric layer **304**. In a representative embodiment, the first piezoelectric layer **304** is a type- C_N piezoelectric material, and is illustratively type- C_N aluminum nitride (AlN). The substrate **301** illustratively comprises single-crystal silicon (Si).

The second piezoelectric layer **311** is disposed over the second electrode **305**; and the third electrode **312** is disposed over the second piezoelectric layer **311**. The second piezoelectric layer **311** is a type- C_N piezoelectric material, and is illustratively type- C_N aluminum nitride (AlN). Cavity **306** is formed in the substrate **301** beneath the first electrode **303** by a known method. The cavity **306** provides acoustic isolation as described above. Alternatively, an acoustic isolator (not shown in FIG. 3B) such as described above and comprising alternating layers of comparatively high and low acoustic impedance may be used instead of the cavity **306**.

The first electrode **303**, the second electrode **305** and the third electrode **312** may be one of a variety of conductive materials, such as metals suitable as electrodes in BAW applications. Generally, materials suitable for the first electrode **103** and the second electrode **105** comprise Refractory metals, Transition metals or Noble Metals. In specific embodiments, the first and second electrodes **103**, **105** illustratively comprise one or more of molybdenum (Mo), aluminum (Al), tungsten (W), platinum (Pt), ruthenium (Ru), niobium (Nb), hafnium (Hf) and uranium-238 (U-238), or other low-loss metals, and are fabricated using a known method. The piezoelectric layer **104** is fabricated in accordance with the present teachings.

In a representative embodiment, and unlike FBAR **300** shown in FIG. 3A, the FBAR **302** does not comprise either the first seed layer **308** over an upper surface **307** of the first electrode **303**, or the second seed layer **310** disposed over an upper surface **309** of the second electrode **305**. Rather, (the type- C_N) first and second piezoelectric layers **304**, **311** are formed over upper surface **307** and **309** of the first electrode **303** and the second electrode **305**, respectively, by methods of representative embodiments described below.

It is appreciated that the FBAR **302** of the representative embodiment comprises an acoustic stack comprising more than one piezoelectric layer having a C_N axis. It is emphasized that other BAW resonator structures comprising an acoustic stack comprising more than one type C_N piezoelectric layer are contemplated. For example, decoupled stacked acoustic resonators comprising more than one FBAR with an acoustic

decoupler disposed therebetween are contemplated. In such an embodiment, each of the FBARs would include a type C_N piezoelectric layer fabricated in accordance with the present teachings. The present teachings contemplate forming the type C_N piezoelectric layers over a surface of respective electrodes. Furthermore, in certain BAW structures comprising an acoustic resonator comprising more than one piezoelectric layer, it is desirable to provide piezoelectric layers comprising anti-parallel C -axes (e.g., one type C_N piezoelectric layer, and one type C_P piezoelectric layer). The present teachings also contemplate forming the piezoelectric layers with C_N axes and forming a type C_P piezoelectric layer over another electrode. The type C_P piezoelectric layer is formed using a known method.

FIG. 4 shows a simplified schematic diagram of a deposition system 400 in accordance with a representative embodiment. The deposition system 400 comprises components commercially available from Advanced Modular Systems, Inc. of Santa Barbara, Calif. USA, for example. In representative embodiments, the deposition system 400 is a sputter deposition system, many of the components and dynamics of which are known to one of ordinary skill in the art. Because many details of the deposition system 400 and sputtering techniques are known, many details are not provided to avoid obscuring the description of the representative embodiments.

The deposition system 400 comprises a reaction chamber 401, which is maintained substantially at vacuum during fabrication of piezoelectric materials of the representative embodiments. The deposition system 400 also comprises gas inlets 403, 404, 405 as inputs to a flow control system 402, which controls the flow of selected gases provided to the gas inlets 403, 404, 405 and the flow rates of the gases provided. A load and lock chamber 413 is provided to allow for the loading of wafers and transfer them to a reaction chamber 401 without breaking vacuum. The flow control system 402 comprises valves (not shown) for selecting the gases to be flowed into the reaction chamber 401, flow controllers (not shown) to measure and control the flow rates thereof, and a controller (not shown) comprising suitable software for controlling the valves. Moreover, the deposition system 400 may comprise an exhaust outlet 412, which has a constant pumping speed, and control of the total pressure in the reaction chamber 401 is provided by changing of gas flow by each flow controller independently or together.

The flow control system 402 may comprise an interface (not shown), such as a graphic user interface (not shown). The deposition system 400 also comprises gas outlets 406, 407, 408, from the flow control system 402. Gas from the gas outlets 406, 407, 408 is provided to the reaction chamber 401. Notably, the use of mixed gases (e.g., Ar and H_2) from a single source is also contemplated. As described more fully below, these gases form atmospheres used in cleaning and sputter depositing materials 411 from first target 409 and second target 410 over the substrate 101 according to representative embodiments.

As described in connection with representative embodiments below, the gas inlets 403, 404, 405 may selectively provide argon (Ar), nitrogen (N) or hydrogen (H), respectively, or a combination thereof. The gas outlets 406, 407, 408 provide a mixture of these gases as to the reaction chamber 401. For example, in forming an Al seed layer (e.g., seed layer 108), Ar plasma may be formed by the outlet of Ar gas from one of the gas outlets 406, 407 in the reaction chamber 401, and results in sputter deposition of seed layer 108 of Al from first and second Al targets 409, 410 over the first electrode 103. After the forming of the seed layer 108, the growth of type- C_N piezoelectric layer (e.g., piezoelectric layer 104) is

provided by selectively sputtering the first and second targets 409, 410 (e.g., Al) in an Ar/ N_2 atmosphere, from gas outlets 406, 407.

In another exemplary method where no seed layer is provided, hydrogen (H_2) is provided from one of the gas outlets 406, 407 to provide a hydrogen atmosphere useful in removing contaminants on the upper surface 107. The contaminants could include metal oxides, gases such as H_2O , N_2 or O_2 on the upper surface 107, as well as processing residues such as photoresist. After the cleaning step in the hydrogen atmosphere, the growth of type- C_N piezoelectric layer (e.g., piezoelectric layer 104) is provided by selectively sputtering the first and second targets 409, 410 (e.g., Al) in an Ar/ N_2 / H_2 atmosphere, from gas outlets 406, 407, 408 or by pre-mixed source of Ar/ H_2 , and a nitrogen source.

Turning to FIG. 5, a method 500 of fabricating a piezoelectric layer in accordance with a representative embodiment is shown in a simplified flow-chart. The method 500 is described with direct reference to the components of FIGS. 1A, 1B and the deposition system 400 of FIG. 4 for illustrative purposes. Fabrication of other FBAR structures, such as FBAR 300, using the method 500, is also contemplated. As will become clearer as the present description continues, the method 500 provides a seed layer 108 over the first electrode 103 in the formation of type- C_N piezoelectric layer 104. As alluded to above, the method 500 may be used to provide first seed layer 308 over the first electrode 303 and the second seed layer 310 over the second electrode 305 of the BAW resonator 300 by repeating the process after forming the intervening layer(s) of the BAW resonator 300.

At 501, the method comprises forming a first electrode over a substrate. Illustratively, the first electrode 103 is formed over the substrate 101. For purposes of description of the method 500, the first electrode 103 is formed by sputter-depositing the selected conductive material over the substrate 101 by a known method, although other methods of forming the first electrode are contemplated. Notably, the formation of the cavity 106 in the substrate 101 may be carried out before fabrication of the acoustic stack 102 of the FBAR 100, with the cavity 106 filled with a sacrificial material (not shown) such as phosphosilicate glass (PSG) or other release processes such as polysilicon and xenon difluoride etchant, known to one of ordinary skill in the art, during the fabrication of layers of the acoustic stack 102; and released after the forming of the layers of the acoustic stack 102. Alternatively, the acoustic isolator 110 is formed in the substrate 101 before forming of the first electrode 103 of the FBAR 109.

The fabrication of the piezoelectric layer 104 begins with cleaning the upper surface 107 of the first electrode 103 before the forming of the piezoelectric layer 104. In a representative embodiment, this cleaning step comprises flowing only Ar to one of the gas inlets 403, 404, 405 and to one of the gas outlets 406, 407 to provide an Ar atmosphere in the reaction chamber 401. An RF bias is applied to the first electrode 103 and the reaction chamber 401 is maintained at ground, so that the first electrode 103 functions as a cathode. An Ar plasma is formed in the reaction chamber 401 and bombards the upper surface 107 of the first electrode 103. Illustratively, the RF power is provided in the range of approximately 15 W to approximately 1 kW, and the Ar bombardment of the upper surface 107 of the first electrode is maintained for a few seconds to a few minutes to ensure proper removal of contaminants. Notably, during this cleaning step, no voltage is applied to the first and second targets 409, 410.

It is believed that the comparatively high kinetic energy of the Ar ions provides suitable bombardment of the upper sur-

face 107 to remove substantially therefrom contaminants such as adsorbed water, adsorbed oxide, adsorbed nitrides and native oxides formed on materials commonly used in the fabrication of the first electrode 103. By substantially removing contaminants from the upper surface 107, the formation of a comparatively pure and electropositive Al seed layer 108 is fostered. Thereafter, a type- C_N AlN piezoelectric layer may be formed by deposition of AlN over the seed layer 108 as described above. Furthermore, in an embodiment where the first electrode 103 comprises Pt, by this cleaning step in the Ar atmosphere, it is believed that contaminants such as adsorbed water, adsorbed oxides and adsorbed nitrides are believed to be removed from the Pt, which does not readily form native oxides.

At 502, the method 500 comprises forming the seed layer 108 over the upper surface 107 of the first electrode 103. In a representative embodiment, at this point the RF power to the first electrode 103 is terminated, and AC power is provided between the first target 409 and the second target 410 in the reaction chamber 401. In a representative embodiment, the piezoelectric material comprises two components, and the first and second targets 409, 410 comprise one of the components. Illustratively, AlN is the piezoelectric material, and the first and second targets 409, 410 comprise Al. Aluminum is sputtered from the first and second targets 409, 410 during the negative potential half-cycle of AC power applied to the first and second targets 409, 410 and provides seed layer 108 over the upper surface 107 of the first electrode 103. During the forming of the seed layer 108, Ar is flowed to one of the gas inlets 403, 404, 405 and from one of the gas outlets 406, 407; and no other gases are flowed from the other gas outlet 406, 407. As a result, Ar plasma created in the reaction chamber 401 results in the sputter deposition of a substantially pure aluminum seed layer from the first and second targets 409, 410 and over the upper surface 107 of the first electrode 103. Notably, the longer AC power is applied between the first and second targets 409, 410, the thicker the seed layer 108 that is formed.

At 503, and after the seed layer 108 is formed, the method 500 comprises flowing a first component of the piezoelectric layer and sputtering the piezoelectric layer 104 over the substrate 101. In a representative embodiment used to form AlN, the first component comprises nitrogen (N_2) gas. The flowing of nitrogen into the reaction chamber 401 comprises providing nitrogen to one of the gas inlets 403, 404, 405 and from one of the gas outlets 406, 407, 408, while continuing the flow of Ar to another of the gas inlets 403, 404, 405 and from the other of the gas outlets 406, 407, 408. During the flowing of nitrogen, AC power is supplied between the first and second targets 409, 410, which comprise the second component (e.g., Al) of the piezoelectric material (e.g., AlN), and the piezoelectric material is formed over the surface of the first and second targets 409, 410. In a representative embodiment, the AC power has a frequency in the range of approximately 20 kHz to approximately 100 kHz, and power in the range of approximately 4 kW to approximately 7 kW. Illustratively, the AC power has a frequency of 7 kW and a frequency of 40 kHz.

The Ar/ N_2 plasma is maintained, and sputters the AlN from the first and second targets 409, 410 to the seed layer 108, in a preferred orientation to provide type C_N AlN over the seed layer 108. Beneficially, the depositing of the piezoelectric layer 104 in the portion of the method is effected without breaking vacuum conditions in the system 400, and comparatively rapidly after completion of the forming of the seed layer 108. Maintaining vacuum and relatively rapidly beginning the deposition of the piezoelectric layer 104 is believed

to substantially prevent adsorption of oxides and nitrides or the formation of other contaminants over the exposed surface (s) of the seed layer 108.

It is believed that because the Al seed layer 108 is comparatively free from contaminants due to the cleaning step in Ar, a substantially electropositive surface of Al is formed over the upper surface 107 of the first electrode 103. The Al seed layer 108 is comparatively highly reactive, and attracts nitrogen of the sputtered AlN. As such, it is believed that AlN is oriented with the nitrogen bonded to the electropositive seed layer of aluminum, and the aluminum of the AlN not being bonded is exposed (i.e., in a structure: seed layer-NAl). Sputtered AlN is then bonded to the exposed aluminum, with the nitrogen bonded to the exposed aluminum (i.e., in a structure: seed layer-N-AL-N-AL). This sequence results in the forming of the crystal structure of type- C_N AlN piezoelectric material, and continues until a suitable thickness of the type- C_N AlN (e.g., piezoelectric layer 104) is realized. In one embodiment, the AlN layer has a thickness of approximately 12,000 Å.

The flow rates of Ar and N_2 are set to control the stress of the resultant AlN. Notably, a higher flow rate of Ar results in tensile stress in the AlN; a lower the flow rate of Ar results in compressive stress in the AlN. Similarly, a higher the flow rate of N_2 results in tensile stress in the AlN; and a lower flow rate of N_2 results in compressive stress in the AlN. In representative embodiments, the flow rate of Ar is in the range of approximately 6 sccm to approximately 25 sccm, and the flow rate of N_2 is in the range of approximately 39 sccm to approximately 50 sccm.

After the piezoelectric layer 104 is formed, the second electrode 105 is formed over the piezoelectric layer 104. The second electrode 105 comprises a metal that is sputter-deposited over the piezoelectric layer 104 by a known method. Illustratively, the second electrode 105 comprises the same material as the first electrode 103. Notably, different materials may be used for the electrodes as may be beneficial to the FBAR (BAW resonator) 100.

After the forming of the second electrode 105, the release of the sacrificial material to form the cavity 106 is carried out using a suitable etchant such as HF. As should be appreciated, if unprotected the seed layer 108 may be etched by the etchant as well. In order to prevent this from significantly deteriorating the seed layer 108, a protective layer (not shown) over and/or around the acoustic stack 102 comprising the first electrode 103, the seed layer 108, the piezoelectric layer 104 and the second electrode 105. The protective layer may comprise a metal 'dam' formed from the same metal as the first and second electrodes 103, 105, for example; or may be formed of a material impervious to the etchant (e.g., HF). Such protective layers are formed by known deposition, lithography and etching sequences. Alternatively, a comparatively thin (e.g., 50 Å) seed layer 108 may be provided. It is believed that a comparatively thin seed layer will not be appreciably etched by the etchant used to release the sacrificial material from the cavity 106. Of course, if instead of the cavity 106, the acoustic isolator 110 is implemented as in FBAR 109, the release of sacrificial material and thus the passivation material would not be necessary.

The FBARs 100, 109 described in connection with the method 500 comprise a single piezoelectric layer. As noted above, the acoustic stack of certain resonator structures comprises more than one piezoelectric layer. It is emphasized that the method 500 can be repeated to form a second type- C_N AlN piezoelectric layer. For example, by repeating the method 500, BAW resonator 300 comprising first and second piezoelectric layers 304, 311 is fabricated by forming first and

second seed layers **308**, **310** respectively over respective upper surfaces **307,309** of first and second electrodes **303**, **305**.

In certain applications, two or more piezoelectric layers may be included in the acoustic stack, and have opposing C-axes. For example, in an acoustic stack described U.S. Pat. No. 7,515,018, the C-axes of the piezoelectric layers may be antiparallel. As can be appreciated, in a structure comprising two piezoelectric layers in an acoustic stack, the first piezoelectric may be type- C_N piezoelectric material (e.g., first piezoelectric layer **304**), and the second piezoelectric layer **311** may be type- C_P piezoelectric material. In such an embodiment, the deposition system **400** and method **500** could be used to form the type- C_N piezoelectric layer by method **500**, and the type- C_P piezoelectric layer would be formed by a known method using deposition system **400**. For example, the first electrode **103** may be formed as described in **501** above; and the C_P piezoelectric layer may be formed by flowing the first component of the piezoelectric material as described in **503** above. Notably, in forming a C_P piezoelectric layer, the sequence of **502** is not performed.

FIG. 6 shows a flow-chart of a method **600** of fabricating a piezoelectric layer in accordance with a representative embodiment. Many of the details of the method **600** are common to the method **500**, and may not be repeated in order to avoid obscuring the presently described embodiments.

The method **600** is described with direct reference to the components of FIGS. 2A, 2B and the deposition system **400** of FIG. 4 for illustrative purposes. Fabrication of other FBAR structures, such as FBAR **302**, using the method **600**, is also contemplated. As will become clearer as the present description continues, the method **600** may be used to form type- C_N piezoelectric layer **104** over the upper surface **107** of the first electrode **103**. As alluded to above, the method **600** may be used to provide the first piezoelectric layer **304** over the upper surface **307** of the first electrode **303** and the second piezoelectric layer **311** over the upper surface **309** of the second electrode **305** of the BAW resonator **302** by repeating the process after forming the intervening layer(s) of the BAW resonator **302**.

At **601** the method comprises providing a substrate. Illustratively, the substrate formed in **601** comprises first electrode **103**, which is formed over the substrate **101**. For purposes of description of the method **600**, the first electrode **103** comprises a metal that is sputter-deposited over the substrate **101** by a known method. Notably, the formation of the cavity **106** in the substrate **101** may be carried out before fabrication of the layers of the acoustic stack **102** of FBAR **100**, with the cavity **106** filled with a sacrificial material (not shown) such as phospho-silicate glass (PSG) during the fabrication of layers of the acoustic stack **102**, and released after forming the layers of the acoustic stack **102**. Alternatively, the acoustic isolator **110** is formed in the substrate **101** before forming of the first electrode **103** of FBAR **109**.

At **602**, the fabrication of the piezoelectric layer **104** begins with cleaning an upper surface **107** of the first electrode **103** before the forming of the piezoelectric layer **104**. In a representative embodiment, this cleaning step comprises flowing Ar and H_2 to respective gas inlets **403**, **404,405** and from one of the gas outlets **406**, **407**, **408**. An RF bias is applied to the first electrode **103** and the reaction chamber **401** is maintained at ground, so that the first electrode **103** functions as a cathode. As in method **500**, an Ar plasma is formed and bombards the upper surface **107** of the first electrode **103**. Illustratively, the RF power is provided in the range of approximately 15 W to approximately 1 kW, and the Ar bombardment of the upper surface **107** of the first electrode is

maintained for a few seconds to a few minutes to ensure proper removal of contaminants. Notably, during this cleaning step, no voltage is applied to the first and second targets **409,410**; and therefore sputtering of material (e.g., Al) from first and second targets **409,410** is insignificant. As such, and in contrast to the method **500**, no seed layer (e.g., seed layer **108**) is formed over the upper surface **107** of the first electrode **103**.

The hydrogen plasma formed in the reaction chamber **401** bombards the upper surface **107** of the first electrode **103**. The flow of H_2 in **402** provides ionized hydrogen (e.g., H_2^+ or H^+) in the reaction chamber **401** that provides a reducing agent at the upper surface **107**. The ionized hydrogen is believed to react with many contaminants such as water, adsorbed oxides, nitrides and native oxides that may be present on the upper surface **107**, and fosters their removal to provide a comparatively clean surface. Moreover, it is believed that the ionized hydrogen forms metal hydrides by saturating dangling bonds on the surface of the metal of the first electrode **103**. Furthermore, in an embodiment where the first electrode **103** comprises Pt, by the cleaning step with H_2 , it is believed that contaminants such as adsorbed water, oxides and nitrides are believed to be removed on Pt, which does not readily form native oxides. Notably, however, because no electrical potential is applied to the first and second targets **409,410** during **602**, Al is not appreciably sputtered from the first and second targets **409,410**.

At **603** the method **600** comprises flowing a first component of the piezoelectric layer **104**. In a representative embodiment used to form AlN, the first component comprises nitrogen (N_2) gas. The flowing of nitrogen into the reaction chamber **401** comprises providing nitrogen to one of the gas inlets **403**, **404**, **405** and from one of the gas outlets **406**, **407**, **408**, while continuing the flow of Ar to another of the gas inlets **403**, **404**, **405** and from the other of the gas outlets **406**, **407**, **408**.

Notably, H_2 may be provided to the same gas outlet **406**, **407**, **408** that provides Ar; or a separate outlet (not shown) may be provided into the reaction chamber to provide an Ar/N/H atmosphere. Alternatively, after the completion of **602**, hydrogen flow may be terminated. The flow rates of Ar and N_2 are set to control the stress of the resultant AlN. As described previously, a higher the flow rate of Ar results in tensile stress in the AlN; and a lower the flow rate of Ar results in compressive stress in the AlN. Similarly, a higher the flow rate of N_2 results in tensile stress in the AlN; and a lower the flow rate of N_2 results in compressive stress in the AlN. In representative embodiments, the flow rate of Ar is in the range of approximately 6 sccm to approximately 25 sccm, and the flow rate of N_2 is in the range of approximately 39 sccm to approximately 50 sccm.

During the flowing of nitrogen, AC power is supplied between the first and second targets **409,410**, and AlN—H compounds are formed over the surface of the first and second targets **409,410**. Moreover, NH_x compounds are believed to be formed in the reaction chamber **401**. It is believed that NH_x compounds formed in the reaction chamber **401** fosters the formation of form an AlN—H compound, due to reactions on the surface of the first and second targets **409,410** between Al and NH_x .

The greater the frequency of the AC power, the lower the deposition rate of AlN. Accordingly, the frequency of the AC power generally should not exceed 100 kHz. Notably, if the flow of hydrogen is maintained during **603**, the cleaning action of hydrogen is realized, but due to its comparatively small atomic mass, hydrogen does not appreciably sputter Al—N from the first and second targets **409,410**.

At **604** piezoelectric material is sputtered from the first and second targets **409,410** over the substrate **101**. In a specific embodiment, AlN—H formed on the first and second targets **409,410** is sputtered to the upper surface **107** of the first electrode **103**. The metal hydrides formed at the upper surface **107** are believed to present an electronegative surface that attracts the aluminum of the AlN—H sputtered from the target. Accordingly, the desired orientation (i.e., metal hydride-AlN—AlN—AlN) to form the crystal structure of type- C_N AlN piezoelectric material is provided and **603** continues until a suitable thickness of the type- C_N AlN (e.g., piezoelectric layer **104**) is realized. In one embodiment, the AlN layer has a thickness of approximately 12,000 Å.

It is believed that hydrogen gas molecules (H_2) and atoms (H) attach to the AlN on the surface of the metal of the first electrode **103**. The hydrogen atoms then penetrate into the interior next to Al side of AlN molecule to form an aluminum-hydride-nitride substance. The AlN molecules are stretched apart to accommodate the hydrogen atoms. The physical structure of the H—AlN molecule may also change. Then as a result of adsorption, the hydrided part of H—AlN aligns and migrates to the surface of the metal hydride formed on the first electrode **103**, combines into hydrogen molecules H_2 and pulls the Al part of AlN toward to first electrode **103**.

As noted above, the H_2 flow into the reaction chamber **401** may be continuous during the forming of the piezoelectric material. As described above, it is believed that the presence of ionized hydrogen in the reaction chamber provides a reducing agent that can remove contaminants such as oxides, nitrides and water, which can interfere with the forming of type- C_N piezoelectric material, or can reduce the coupling coefficient (kt^2) and therefore degrade the quality (Q) factor of the piezoelectric material, or both. In a representative embodiment, the flow rate of H_2 during the forming of the AlN is at least approximately 8 sccm. In certain embodiments, the flow rate of H_2 during the forming of the AlN is as great as approximately 30 sccm. Illustratively, a flow rate of H_2 of approximately 14 sccm provides a C_N AlN piezoelectric material with kt^2 of approximately 5.5%. As described below, the coupling coefficient kt^2 of AlN fabricated with continuous flow of H_2 at the flow rates noted provides C_N AlN piezoelectric material with kt^2 of approximately 2% to approximately 6.6%. FIG. 7 shows the coupling coefficient versus hydrogen flow rate during the forming of the piezoelectric layer in **603**.

After the piezoelectric layer **104** is formed, the second electrode **105** is formed over the piezoelectric layer **104**. The second electrode **105** comprises a metal that is sputter-deposited over the piezoelectric layer **104** by a known method. Illustratively, the second electrode **105** comprises the same material as the first electrode **103**.

The FBARs **200, 201** described in connection with the method **600** comprise a single piezoelectric layer. As noted above, the acoustic stack of certain resonator structures comprises more than one piezoelectric layer. It is emphasized that the method **600** may be repeated to form a second type- C_N AlN piezoelectric layer. For example, by repeating the method **600** in a selected sequence, BAW resonator **302** comprising first and second piezoelectric layers **304, 311**, respectively, are formed over respective upper surfaces **307, 309** of first and second electrodes **303, 305**.

In certain applications, two or more piezoelectric layers may be included in the acoustic stack, and have opposing C-axes. For example, in an acoustic stack described in U.S. Pat. No. 7,515,018, the C-axes of the piezoelectric layers may be antiparallel. As can be appreciated, in a structure comprising two piezoelectric layers in an acoustic stack, the first piezoelectric may be type- C_N piezoelectric (e.g., first and

second piezoelectric layer **304**), and the second piezoelectric layer **311** may be type- C_P piezoelectric. In such an embodiment, the deposition system **400** would be used to form the type- C_N piezoelectric layer by method **600**, and the type- C_P piezoelectric layer would be formed by a known method using deposition system **400**.

If the second piezoelectric layer (e.g., second piezoelectric layer **311**) is type- C_N AlN, the cleaning step of method **600** would be carried out to remove contaminants from the electrode over which the second piezoelectric layer is formed (e.g., second electrode **305**). If there is no intervening acoustic decoupling layer or intervening electrode, the cleaning step of the method **600** would be carried out to remove contaminants from the surface (e.g., upper surface **309**) of the second electrode **305**. The forming of the second piezoelectric layer would be effected by repeating **603** of the method **600**.

In certain applications, two or more piezoelectric layers may be included in the acoustic stack, and have opposing C-axes. For example, in the acoustic stacks described in U.S. patent application Ser. No. 12/201,641 and U.S. Pat. No. 7,515,018, the C-axes of the piezoelectric layers may be antiparallel. As can be appreciated, in a structure comprising two piezoelectric layers in an acoustic stack, the first piezoelectric may be type- C_N (e.g., first piezoelectric layer **304**), and the second piezoelectric layer (e.g., second piezoelectric layer **311**) may be type- C_P . In such an embodiment, the deposition system **400** would be used to form the type- C_N piezoelectric layer by method **600**, and the type- C_P piezoelectric layer would be formed by a known method using deposition system **400**.

FIG. 7 shows a graph of intrinsic coupling constant (kt^2) versus Hydrogen flow rate of a piezoelectric layer fabricated in accordance with a representative embodiment. In particular, in region **701** of the graph, the intrinsic coupling constant, kt^2 is indicative of C_P AlN formed in accordance with a representative embodiment. By contrast, in region **702**, the intrinsic coupling constant, kt^2 is indicative of C_N AlN formed by a known method.

In accordance with illustrative embodiments, methods of fabricating piezoelectric materials and acoustic resonators for various applications such as in electrical filters are described. One of ordinary skill in the art appreciates that many variations that are in accordance with the present teachings are possible and remain within the scope of the appended claims. These and other variations would become clear to one of ordinary skill in the art after inspection of the specification, drawings and claims herein. The invention therefore is not to be restricted except within the spirit and scope of the appended claims.

The invention claimed is:

1. A method of fabricating a piezoelectric material comprising a first component and a second component, the method comprising:

- providing a substrate;
- initially flowing hydrogen over the substrate;
- after the initially flowing of the hydrogen over the substrate,
- flowing the first component to form the piezoelectric material over a surface of a target comprising the second component;
- sputtering the piezoelectric material from the target onto the substrate; and
- flowing the hydrogen over the substrate during the sputtering at a rate sufficient to cause a piezoelectric film having a defined polarity to be formed over the substrate, wherein

17

a seed layer is not formed over the substrate prior to the sputtering.

2. A method of fabricating a piezoelectric material as claimed in claim 1, wherein the piezoelectric film comprises a compression-negative (C_N) polarity.

3. A method of fabricating a piezoelectric material as claimed in claim 1, wherein the flowing of hydrogen is continuous during the fabricating of the piezoelectric film.

4. A method of fabricating a piezoelectric material as claimed in claim 1, further comprising, after the depositing: ceasing flow of the hydrogen; forming a second substrate over the piezoelectric film; and sputtering the piezoelectric material from the target over the second substrate.

5. A method of fabricating a piezoelectric material as claimed in claim 4, further comprising, before forming the second substrate flowing hydrogen over the second substrate, wherein the piezoelectric material comprises a compression-negative (C_N) material.

6. A method of fabricating a piezoelectric material as claimed in claim 3, wherein the substrates comprise a metal.

7. A method of fabricating a piezoelectric material as claimed in claim 6, wherein the metal comprises one of: molybdenum (Mo), aluminum (Al), tungsten (W), platinum (Pt), and ruthenium (Ru).

8. A method of fabricating a piezoelectric material as claimed in claim 1, wherein the first component comprises nitrogen and the second component comprises aluminum.

9. A method of fabricating a piezoelectric material as claimed in claim 4, wherein the piezoelectric material sputtered on the first substrate comprises a compression-negative (C_N) material, and the piezoelectric material sputtered over the second substrate comprises a compression-positive (C_P) material.

10. A method of fabricating a piezoelectric material as claimed in claim 1, wherein the flowing of hydrogen during the depositing forms NH_x .

11. A method of fabricating a bulk acoustic wave (BAW) resonator having a piezoelectric material consisting essentially of first and second components, the method comprising: forming a first electrode over a substrate; forming a seed layer consisting essentially of the second component over the substrate; flowing the first component of the piezoelectric material to form the piezoelectric material over a surface of a target consisting essentially of the second component of the piezoelectric material; and

18

sputtering the piezoelectric material from the target onto the seed layer to deposit a piezoelectric layer having a compression-negative (C_N) polarity.

12. A method as of fabricating a BAW resonator as claimed in claim 11, further comprising forming a second electrode over the piezoelectric material.

13. A method as of fabricating a BAW resonator as claimed in claim 11, wherein the seed layer comprises aluminum.

14. A method of fabricating a BAW resonator as claimed in claim 13, wherein the first electrode and the second electrode comprise one of molybdenum (Mo), aluminum (Al), tungsten (W), platinum (Pt), and ruthenium (Ru).

15. A method of fabricating a BAW resonator as claimed in claim 11, further comprising, after the forming of the first electrode and before the forming of the seed layer, forming a plasma and removing a contaminant from a surface of the first electrode.

16. A method of fabricating a BAW resonator as claimed in claim 11, further comprising, after the forming of the seed layer, maintaining a flow of an inert gas over the surface of the seed layer during the depositing of the first component and the piezoelectric material.

17. A method of fabricating a BAW resonator as claimed in claim 12, further comprising, after the depositing of the piezoelectric material: sputtering a second piezoelectric material over the second electrode, wherein the second piezoelectric material comprises a compression-positive (C_P) polarity.

18. A method of fabricating a BAW resonator as claimed in claim 12, wherein the first electrode and the second electrode comprise a metal.

19. A method of fabricating a BAW resonator as claimed in claim 18, wherein the metal comprises one of: molybdenum (Mo), aluminum (Al), tungsten (W), platinum (Pt), and ruthenium (Ru).

20. A method of fabricating a BAW resonator as claimed in claim 11, wherein the first component comprises nitrogen and the second component comprises aluminum.

21. A method of fabricating a BAW resonator as claimed in claim 11, wherein the seed layer is selected to foster growth of the piezoelectric material comprising the compression-negative (C_N) polarity.

22. A method of fabricating a BAW resonator as claimed in claim 11, wherein vacuum is maintained during the method.

23. The method of claim 11, wherein the first component is nitrogen (N) and the second component is aluminum (Al).

* * * * *